********** SPICE DECK **********

*** Generated from pudf000.mag by magic's spice generator
*** technology: scmos
*** extraction style: lambda=1.0
*** units per lambda: dlm V2.20
*** timestamp: 628905226
*** version: dlm V2.2
*** Capacitance Threshold = 5000 units
*** Resistance Scale = 1000 units

M10x13 O 50 gnd gnd NMOS W=4.0U L=31.0U
C1 50 gnd 20.86fF
C2 O gnd 12.80fF

Cell Device Sizes

Transistor	Width (λ)	Length (λ)
50	4	31

Institute for Technology Development

ADVANCED MICROELECTRONICS DIVISION

SCALABLE CMOS (SCMOS) DOUBLE METAL I / C STANDARD CELL LIBRARY	**pudf000** PULL_DOWN	DATE: Mar 7,1990 VERSION: dlmV2.2



SYMBOL

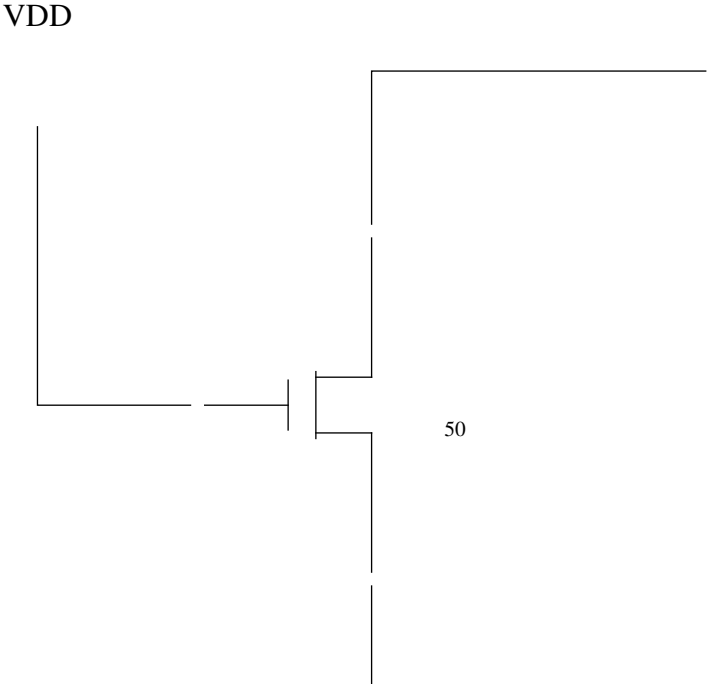

TERMINAL LOCATION (In Lambda)

GRID	PIN_NAME	Y_LOC	CLASS
1	FeedThru	----	----
2	O	51	0
3	FeedThru	----	----

LOGIC EQUATIONS: O = 0

Truth Table Not Applicable