********** SPICE DECK **********

*** Generated from puuf000.mag by magic's spice generator
*** technology: scmos
*** extraction style: lambda=1.0
*** units per lambda: dlm V2.20
*** timestamp: 628905226
*** version: dlm V2.2
*** Capacitance Threshold = 5000 units
*** Resistance Scale = 1000 units

M10x25 O 20 vdd vdd PMOS W=4.0U L=36.0U
C2 20 gnd 22.86fF
C3 O gnd 11.60fF

Cell Device Sizes

Transistor	Width (λ)	Length (λ)
20	4	36

Institute for Technology Development

ADVANCED MICROELECTRONICS DIVISION

SCALABLE CMOS (SCMOS) DOUBLE METAL I / C STANDARD CELL LIBRARY	**puuf000** PULL_UP	DATE: Mar 7,1990 VERSION: dlmV2.2



SYMBOL

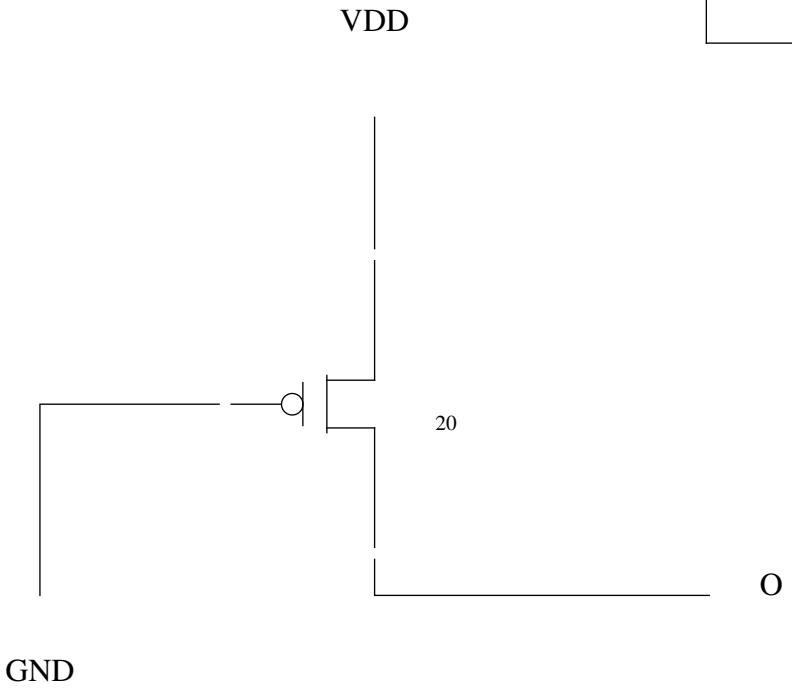

Institute for Technology Development

ADVANCED MICROELECTRONICS DIVISION

SCALABLE CMOS (SCMOS) DOUBLE METAL I / C STANDARD CELL LIBRARY	**puuf000** PULL_UP	DATE: Mar 7,1990 VERSION: dlmV2.2

TERMINAL LOCATION (In Lambda)

GRID	PIN_NAME	Y_LOC	CLASS
1	FeedThru	----	----
2	O	16	0
3	FeedThru	----	----

LOGIC EQUATIONS: O = 1

Truth Table Not Applicable