

CS/ECE 252: INTRODUCTION TO COMPUTER ENGINEERING

UNIVERSITY OF WISCONSIN—MADISON

Professor Karithikeyan Sankaralingam

TAs: Rebecca Lam, Newsha Ardalani, Suriyha Balaram Sankari, Kamlesh Prakash and
Yinggang Huang

Examination 1

In Class (50 minutes)

Friday, Feb 10, 2012

Weight: 17.5%

NO: BOOK(S), NOTE(S), CALCULATORS OF ANY SORT.

This exam has 9 pages, including a blank page at the end. Plan your time carefully, since some problems are longer than others. You must turn in pages 1 to 7.

LAST NAME: _____

FIRST NAME: _____

SECTION: _____

ID# _____

Question	Maximum Points	Points
1	8	
2	4	
3	4	
4	2	
5	2	
6	3	
7	3	
8	4	
Total	30	

Q1 (8 points)

- a. Convert the ASCII string “-9.75” to its hexadecimal representation. Only represent the characters between the quotation marks and assume it is a null terminated string.

- 9 . 7 5
2D 39 2E 37 35

- b. Convert the following binary code into an ASCII string:

0111 0000 0011 0001 0011 0011 0111 0011 0000 0000

“p13s”

- c. Convert the decimal number **216** into its 4-digit hexadecimal representation.

0x00D8

- d. Find the unsigned fixed point binary representation of the decimal number **128.125**.

10000000.001

Q2. (4 points)

Consider the 8-bit binary bit pattern **10101010**. What is its decimal (base ten) value if the bit pattern is interpreted as:

- a. A **one's complement** integer?

$$(10101010)_1 = - (01010101) = - (64+16+4+1) = -85$$

- b. A **two's complement** integer?

$$(1010\ 1010)_2 = - (0101\ 0110) = -86$$

Q3 (4 points)

Consider the Octal number system (base 8) where only the digits 0-7 are legal.

- a. What is the maximum unsigned decimal value that one can represent with **5** octal digits?

$$77777_8 = 8^5 - 1 = 32767$$

- b. What is the maximum unsigned decimal value that one can represent with **n** octal digits?

$$8^n - 1$$

Q4 (2 points)

Given the two 16-bit numbers expressed in hexadecimal representation: **xABCD** and **xFEED**, evaluate the following expression. Give your answer in hexadecimal (base 16) representation.

$$\mathbf{xABCD \text{ AND } (\text{NOT}(xFEED))}$$

0x0100

Q5. (2 points)

Add the following 6-bit two's complement binary numbers:

$$\mathbf{011010 + 100110}$$

Express your answer in 6-bit two's complement. Explain why the output is correct or incorrect

$$\begin{array}{r} 011010 \quad +26 \\ + 100110 \quad -26 \\ \hline 000000 \end{array}$$

Must be correct since we are adding a positive and negative number, hence no overflow can occur. We can confirm by converting to decimal, too.

Q6 (3 points)


Number the following in order of their levels of abstraction, where “1” represents the lowest level and “6” is the highest.

2	Microprocessor
6	Problem
1	Logic gates
5	Algorithm
3	Instruction Set Architecture
4	Java Code

Q7 (3 points)

Given the black boxes of Figure 1, show how to connect them together to calculate the following equation: $a^2 + b^2 + c^2 + 2ab + 2ac + 2bc$. Assume that the output of a box may be connected to multiple inputs. Give an answer using **three** boxes. **Hint: Try factoring.**

$$a^2 + 2ab + b^2 + 2ac + 2bc + c^2 = (a+b+c)^2$$

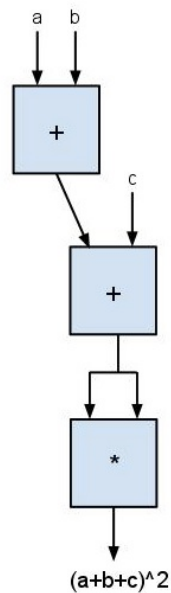

Scratch page

ASCII Table

Character	Hex	Character	Hex	Character	Hex	Character	Hex
nul	00	sp	20	@	40	`	60
soh	01	!	21	A	41	a	61
stx	02	“	22	B	42	b	62
etx	03	#	23	C	43	c	63
eot	04	\$	24	D	44	d	64
enq	05	%	25	E	45	e	65
ack	06	&	26	F	46	f	66
bel	07	‘ (<i>Apostr.</i>)	27	G	47	g	67
bs	08	(28	H	48	h	68
ht	09)	29	I	49	i	69
lf	0A	*	2A	J	4A	j	6A
vt	0B	+	2B	K	4B	k	6B
ff	0C	, (<i>Comma</i>)	2C	L	4C	l	6C
cr	0D	-	2D	M	4D	m	6D
so	0E	. (<i>Period</i>)	2E	N	4E	n	6E
si	0F	/	2F	O	4F	o	6F
dle	10	0	30	P	50	p	70
dc1	11	1	31	Q	51	q	71
dc2	12	2	32	R	52	r	72
dc3	13	3	33	S	53	s	73
dc4	14	4	34	T	54	t	74
nak	15	5	35	U	55	u	75
syn	16	6	36	V	56	v	76
etb	17	7	37	W	57	w	77
can	18	8	38	X	58	x	78
em	19	9	39	Y	59	y	79
sub	1A	:	3A	Z	5A	z	7A

esc	1B	;	3B	[5B	{	7B
fs	1C	<	3C	\	5C		7C
gs	1D	=	3D]	5D	}	7D
rs	1E	>	3E	^	5E	~	7E
us	1F	?	3F	_ (<i>Undrscre</i>)	5F	del	7F