43. Log-structured File Systems


Operating System: Three Easy Pieces


LFS: Log-structured File System

- Memory sizes were growing.
- Large gap between random IO and sequential IO performance.
- Existing File System perform poorly on common workloads.
- File System were not RAID-aware.

Writing to Disk Sequentially

How do we transform all updates to file-system state into a series of sequntial writes to disk?






metadata needs to be updated too. (Ex. inode)



Writing to Disk Sequentially and Effectively

- Writing single blocks sequentially does not guarantee efficient writes
 - After writing into A0, next write to A1 will be delayed by disk rotation
- Write buffering for effectiveness
 - Keeps track of updates in memory buffer (also called segment)
 - Writes them to disk all at once, when it has sufficient number of updates.

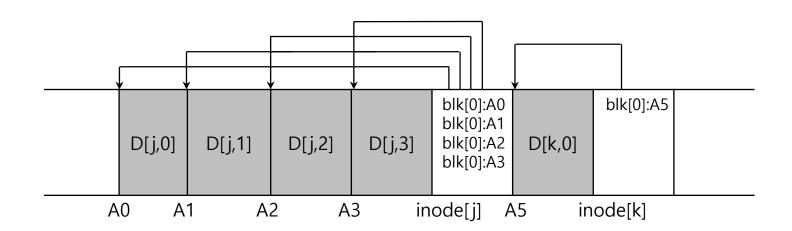

How Much to Buffer?

- Each write to disk has fixed overhead of positioning
 - Time to write out D MB

$$T_{write} = T_{position} + \frac{D}{R_{peak}}$$
 (43.1)

 $(T_{position}$: positioning time, R_{peak} : disk transfer rate)

- To amortize the cost, how much should LFS buffer before writing?
 - Effective rate of writing can be denoted as follows

$$R_{effecitve} = \frac{D}{T_{write}} = \frac{D}{T_{position} + \frac{D}{R_{neak}}}$$
 (43.2)

How Much to Buffer?

■ Assume that $R_{effecitve} = F \times R_{peak}$ (F: fraction of peak rate, 0 < F < 1), then

$$R_{effecitve} = \frac{D}{T_{position} + \frac{D}{R_{peak}}} = F \times R_{peak}$$
 (43.3)


Solve for D

$$D = \frac{F}{1 - F} \times R_{peak} \times T_{position}$$
 (43.6)

- If we want F to be 0.9 when $T_{position} = 10 msec$ and $R_{peak} = 100 MB/s$, then D = 9 MB by the equation.
 - Segment size should be 9MB at least.


Finding Inode in LFS

- Inodes are scattered throughout the disk!
- Solution is through indirection "Inode Map" (imap)
- LFS place the chunks of the inode map right next to where it is writing all of the other new new information

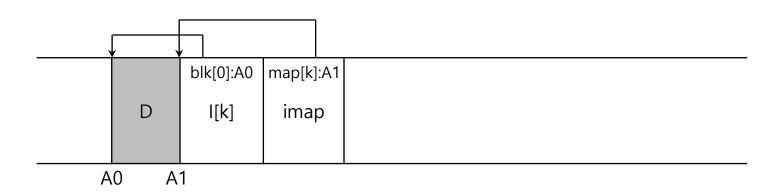

The Checkpoint Region

- How to find the inode map, spread across the disk?
 - The LFS File system have fixed location on disk to begin a file lookup
- Checkpoint Region contains pointers to the latest of the inode map
 - Only updated periodically (ex. Every 30 seconds)
 - → performance is not ill-affected

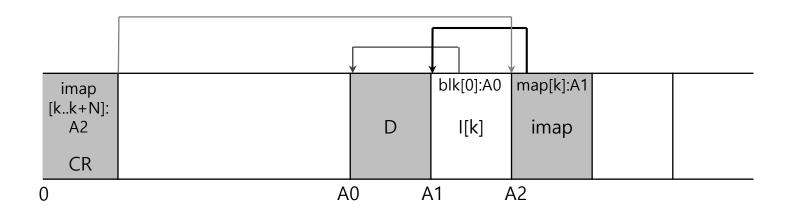


Reading a File from Disk: A Recap

- Read checkpoint region
- Read entire inode map and cache it in memory
- Read the most recent inode
- Read a block from file by using direct or indirect or doubly-indirect pointers

What About Directories?

- Directory structure of LFS is basically identical to classic UNIX file systems.
 - Directory is a file which data blocks consist of directory information

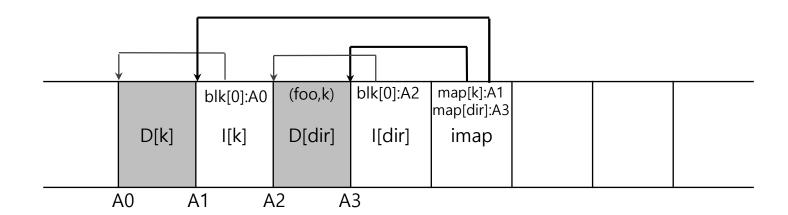


Garbage Collection

LFS keeps writing newer version of file to new locations.


Thus, LFS leaves the older versions of file structures all over the disk, call as garbage.

Examples: Garbage

- For a file with a singe data block
 - Overwrite the data block: both old data block and inode become garbage

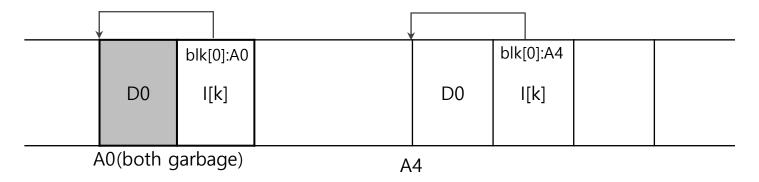

Append a block to that original file k: old inode becomes garbage

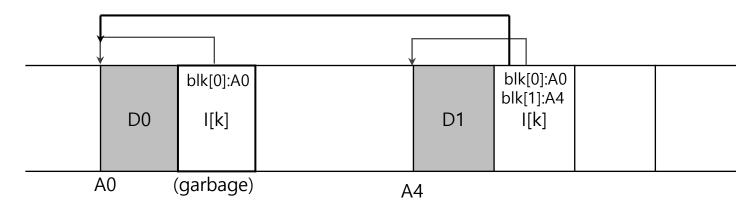

Handling older versions of inodes and data blocks


- One possibility: Versioning file system
 - keep the older versions around
 - Users can restore old file versions

- LFS approach: Garbage Collection
 - Keep only the latest live version and periodically clean old dead versions
 - Segment-by-segment basis
 - Block-by-block basis cleaner eventually make free holes in random location
 - → Writes can not be sequential anymore

Determining Block Liveness

Segment summary block (SS)

- Located in each segment
- Inode number and offset for each data block are recorded
- Determining Liveness
 - The block is live if the latest inode indicates the block

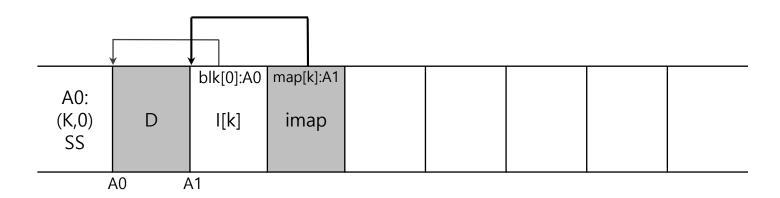

Version number can be used for efficient liveness determining

Which Blocks to Clean, and When?

- When to clean
 - Periodically
 - During idle time
 - When the disk is full
- Which blocks to clean
 - Segregate hot/cold segments
 - Hot segment: frequently over-written
 - → more blocks are getting over-written if we wait a long time before cleaning
 - Cold segment: relatively stable
 - → May have a few dead blocks, but the other blocks are stable
 - Clean cold segment sooner and hot segment later

Crash Recovery and the Log

- Log organization in LFS
 - CR points to a head and tail segment
 - Each segment points to next segment
- LFS can easily recover by simply reading latest valid CR
 - The latest consistent snapshot may be quite old
- To ensuring atomicity of CR update
 - Keep two CRs
 - ◆ CR update protocol: timestamp
 → CR → timestamp
- Roll forward
 - Start from end of the log (pointed by the lastest CR)
 - Read next segments and adopt any valid updates to the file system

Disclaimer: This lecture slide set was initially developed for Operating System course in Computer Science Dept. at Hanyang University. This lecture slide set is for OSTEP book written by Remzi and Andrea at University of Wisconsin.