

CS/ECE 252: INTRODUCTION TO COMPUTER ENGINEERING

UNIVERSITY OF WISCONSIN—MADISON

Prof. Karthikeyan Sankaralingam, Pradip Vallathol

TAs: Deepika Muthukumar, Sujith Surendran, Murali Sivalingam, Lisa Ossian

Midterm Examination 3

In Class (50 minutes)

Wednesday, April 09, 2014

Weight: 17.5%

NO: BOOK(S), NOTE(S), OR CALCULATORS OF ANY SORT.

The exam has **nine** pages. **Circle your final answers.** Plan your time carefully since some problems are longer than others. You **must turn in the pages 1-8.** Use the blank sides of the exam for scratch work. The Instruction set is provided on the last page.

LAST NAME: _____

FIRST NAME: _____

ID# _____

Problem	Maximum Points	Points Earned
1	4	
2	5	
3	2	
4	3	
5	4	
6	6	
7	3	
8	3	
Total	30	

Problem 1 (4 points)

This problem has 2 parts which consider the following LC-3 instruction located at memory address x4300.

x4300: 0000 010 000000100

a. Assume the initial contents of the registers are as follows:

R0 contains 4

R1 contains 3

R2 contains 6

R3 contains 0

If the instruction at 0x42FF is the one shown below, what is the value of the PC after the instruction at 0x4300 is executed?

x42FF: 0001 000 001 1 00001

x4300: 0000 010 000000100

b. Assume the initial contents of the registers are as follows:

R0 contains 4

R1 contains 3

R2 contains 6

R3 contains 0

If the instruction at 0x42FF is the one shown below, what is the value of the PC after the instruction at 0x4300 is executed?

x42FF: 0101 011 001 1 00000

x4300: 0000 010 000000100

Problem 2 (5 points)

The PC has the value `x5010`. The following memory locations contain values as shown:

Memory Location	Contents
<code>x5013</code>	<code>x6023</code>
<code>x6023</code>	<code>x6025</code>
<code>x6025</code>	<code>x0112</code>
<code>x6027</code>	<code>x824C</code>

a. (3 points) The following LC-3 instructions are then executed, causing a value to be loaded into R3. What is that value in R3 after the instruction at `x5012` is executed?

```
x5010: 1110 100 000000010  
x5011: 0110 101 100 000000  
x5012: 0110 011 101 000000
```

b. (1 point) In English words, describe what the program (the three-instructions sequence) is accomplishing.

c. (1 point) We could replace the three-instruction sequence (in part a) with a single instruction (at memory location `x5010`). What is it ? (Show the 16 bits of the instruction)

Problem 3 (2 points)

Which of the following LC-3 instructions at address $0x0350$ will always clear register R0 (i.e. set the contents of R0 to all zeroes) ?

- a. 0001 000 000 1 00000
- b. 0101 000 000 1 00000
- c. 1110 000 000000000
- d. 0010 000 000000000


Problem 4 (3 points)

a. (1 point) In any program, what is the range of values that the immediate field of an ADD instruction can take?

b. (1 point) Suppose the number of opcodes for the LC-3 increases to 64. If the instruction size stays the same, how will this affect the range of addresses a BR instruction can access?

c. (1 point) An LDR instruction, located at $x3000$, uses R1 as its base register. The value currently in R1 is $x1000$. What is the largest address that this instruction can load from?

Problem 5 (4 points)

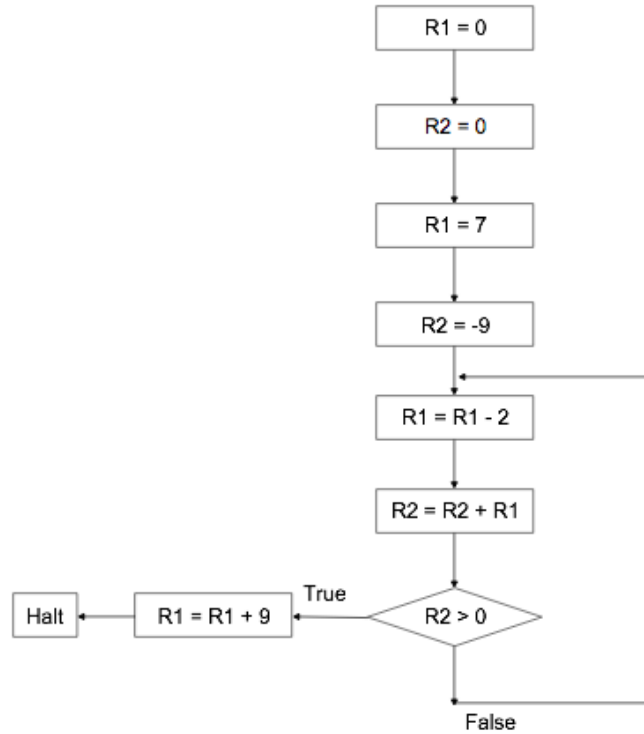

Consider the program represented by the flowchart above.

Please complete the table (2 instructions and 6 comments) in accordance with the flow chart.

Address	Instruction	Comment
x3000	0101 001 001 1 00000	Clear R1.
x3001	0101 010 010 1 00000	
x3002	0001 001 001 1 00111	
x3003	0001 _____	Set R2 to -9.
x3004	0001 001 001 1 11110	
x3005	0001 010 010 0 00 001	
x3006	0000 _____	
x3007	0001 001 001 1 01001	
x3008	1111 0000 00100101	HALT

Problem 6 (6 points)

Please fill in the following LC-3 machine language program to implement a 2-input NOR function. Assume that the 2 inputs are stored in registers R1 and R2. The final output should be stored in register R3. (Adding comments to each machine language instruction will assist in awarding partial credit).

Instruction	Comment

Problem 7 (3 points)

Please enter the missing values in the following LC-3 machine language program to multiply the value in R0 by the value in R1. Store the product of the multiplication in R2. (Adding comments to each machine language instruction will assist in awarding partial credit).

Note: The opcode bits [15:12] have been provided for each instruction.

Address	Instruction	Comment
x3200	0101 010 010 1 00000	
x3201	0001	
x3202	0001	
x3203	0000	
x3204	1111 0000 00100101	HALT

Problem 8 (3 points)

In this problem, the program starts executing from address `0x3000`.

If the value stored in R0 is 0 at the end of the execution of the instruction at `0x3003`, what can be inferred about R5?

```
0x3000: 0101 000 000 1 00000
0x3001: 0101 100 101 1 00001
0x3002: 0000 010 000000001
0x3003: 0001 000 000 1 00001
```

- a. R5 is equal to 0
- b. R5 is equal to 1
- c. R5 is equal to 2
- d. R5 is equal to 3

Hint: Start with the last instruction and work backwards. If there is a branch instruction, decide if that branch is taken or not, for the value in R0 to be 0.