

CS 640 Introduction to Computer Networks

Lecture16

CS 640

Role of data link layer

- Service offered by layer 1: a stream of bits
- Service to layer 3: sending & receiving frames
- To achieve this layer 2 does
 - Framing
 - Error detection (rarely error correction)
 - Multiplexing
 - Media access control
 - Addressing (multiple access links)

CS 640


Today's lecture

- Framing
- Error detection
- Reliability through retransmission

CS 640

Framing 1 – sentinel approach


- Used by Point-to-Point-Protocol (PPP)
- Special characters for start and end of frame
- Use “byte stuffing” if they appear in body



CS 640

Framing 2 – byte counting approach


- Used by DECNET’s DDCMP
- Instead of “end of frame” character uses frame length field



CS 640

Framing 3 – bit oriented


- Frames delimited by special bit patterns
- HDLC uses “01111110”
- If “011111” occurs in body, sender inserts “0”



CS 640

Framing 4 – clock based framing

- Used by protocols from the phone network
- Fixed size frames
- No escape codes

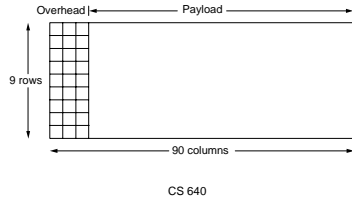

Today's lecture

- Framing
- Error detection
- Reliability through retransmission

CS 640


Error detection

- Typical errors important to protect against
 - Random bits flipped
 - Bursts of corrupted bits
- Aim of error detection schemes
 - Catch most common errors
 - No solution can catch all errors
 - Strengths depends on algorithm and size increase
- Example: parity bit

CS 640

Two dimensional parity

- Stronger than parity bit
 - Catches 1,2,3 bit errors
 - Catches most 4 bit errors
- Easy to compute



CS 640


Internet checksum

- Sum of 16 bit words in message
- When result exceeds 2^{16} drop 17th bit, add 1
- Uses 1's complement arithmetic
- Easy to compute in software (even in the '70s)
- Weaker error detection than CRC

CS 640

Cyclic redundancy check


- Message is a polynomial
- Coefficients modulo 2
 - Values can be 0 or 1
 - +,- same as XOR
- Checksum is remainder of division msg. / generator

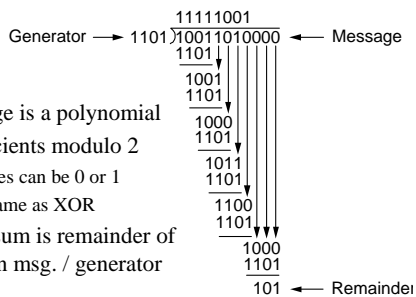

CS 640

CRC – contd.

- Size of remainder depends on size of generator
- Error detection properties depend on generator
- Standards specify generator
- Easy to implement in hardware and software



Today's lecture

- Framing
- Error detection
- Reliability through retransmission

CS 640

Reliable transmission

- Frames/packets can be lost, corrupted
- Retransmit to ensure reliability (error correction)
 - Most common at transport layer (layer 4)
 - Done in some data link layers too (layer 2)
- How does sender know when to retransmit?
 - Use *acknowledgements* and *timeouts*


CS 640

Acknowledgements & Timeouts

- An *acknowledgement* (ACK) is a packet sent by one host in response to a packet it has received
 - Making a packet an ACK is simply a matter of changing a field in the transport header
 - Data can be *piggybacked* in ACKs
- A *timeout* is a signal that an ACK to a packet that was sent has not yet been received within a specified time
 - A timeout triggers a *retransmission* of the original packet from the sender
 - How are timers set?

CS 640

Acknowledgements & Timeouts

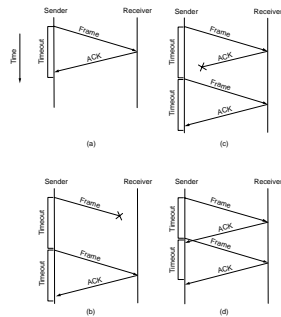


CS 640

Finding the right length for timeout

- Propagation delay: delay between transmission and receipt of packets between hosts
- Propagation delay can be used to estimate timeout period
- How can propagation delay be measured?
- What else must be considered in the measurement?
 - Harder for transport layer than for data link layer

CS 640

Stop-and-Wait Process




- Sender won't send next packet until sure receiver has last one
- The packet/Ack sequence enables reliability and flow control
- Sequence numbers help avoid problem of duplicate packets
- Problem: keeping the pipe full
- Example
 - 1.5Mbps link \times 45ms RTT = 67.5Kb (8KB)
 - 1KB frames implies 1/8th link utilization

CS 640

Solution: Pipeline via Sliding Window

- Allow multiple outstanding (un-ACKed) frames
- Upper bound on un-ACKed frames, called *window* (flow control)



CS 640

Buffering on Sender and Receiver

- Sender buffers data so that if data lost, it can resend
- Receiver buffers data so that if data is received out of order, it can be held until all packets are received
- How can we prevent the sender overflowing receiver's buffer (flow control)?
 - Receiver tells sender its buffer size during connection setup
- How can we ensure reliability?
 - Go-Back-N
 - Send all N un-ACKed packets when a loss is signaled (inefficient)
 - Selective retransmit
 - Only send un-ACKed packets (a bit trickier to implement)

CS 640

Sliding Window: Sender

- Assign sequence number to each frame (**SeqNum**)
- Maintain three state variables:
 - send window size (**SWS**)
 - last acknowledgment received (**LAR**)
 - last frame sent (**LFS**)
- Maintain invariant: **LFS** - **LAR** \leq **SWS**



- Advance **LAR** when ACK arrives
- Buffer up to **SWS** frames

CS 640

Sliding Window: Receiver

- Maintain three state variables
 - receive window size (**RWS**)
 - largest frame acceptable (**LFA**)
 - last frame received (**LFR**)
- Maintain invariant: **LFA** - **LFR** \leq **RWS**



- Frame **SeqNum** arrives:
 - if **LFR** < **SeqNum** \leq **LFA** then accept
 - if **SeqNum** \leq **LFR** or **SeqNum** > **LFA** then discard
- Send *cumulative* ACKs – send ACK for largest frame such that all frames less than this have been received


CS 640

Sequence Number Space

- **SeqNum** field is finite; sequence numbers wrap around
- Sequence number space must be larger than number of outstanding frames
- **SWS** \leq **MaxSeqNum** - 1 is not sufficient
 - suppose 3-bit **SeqNum** field (0..7)
 - **SWS**=**RWS**=7
 - sender transmit frames 0..6 which arrive, but ACKs lost
 - sender retransmits 0..6
 - receiver expecting 7, 0..5, but receives the original 0..5
- **SWS** < (**MaxSeqNum**+1) / 2 is correct rule
- Intuitively, **SeqNum** “slides” between two halves of sequence number space

CS 640

Stop & wait sequence numbers

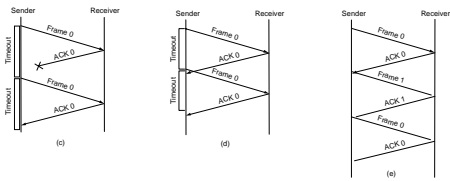

- Simple sequence numbers enable *the receiver* to discard duplicate copies of the same frame
- Stop & wait allows one outstanding frame, requires two distinct sequence numbers

CS 640

Another Pipelining Possibility: Concurrent Logical Channels

- Multiplex 8 logical channels over a single link
- Run stop and wait on each logical channel
- Maintain three state bits per channel
 - channel busy
 - current sequence number out
 - next sequence number in
- Header: 3 bit channel num, 1 bit sequence num
 - 4-bits total, same as sliding window protocol
- Separates *reliability* from *order*

CS 640

Sliding Window Summary

- Sliding window is best known algorithm in networking
- First role is to enable reliable delivery of packets
 - Timeouts and acknowledgements
- Second role is to enable in order delivery of packets
 - Receiver doesn't pass data up to next layer until it has packets in order
- Third role is to enable flow control
 - Prevents server from overflowing receiver's buffer

CS 640

Sliding Window Example

