


Inside a Laptop




Close up of Memory unit

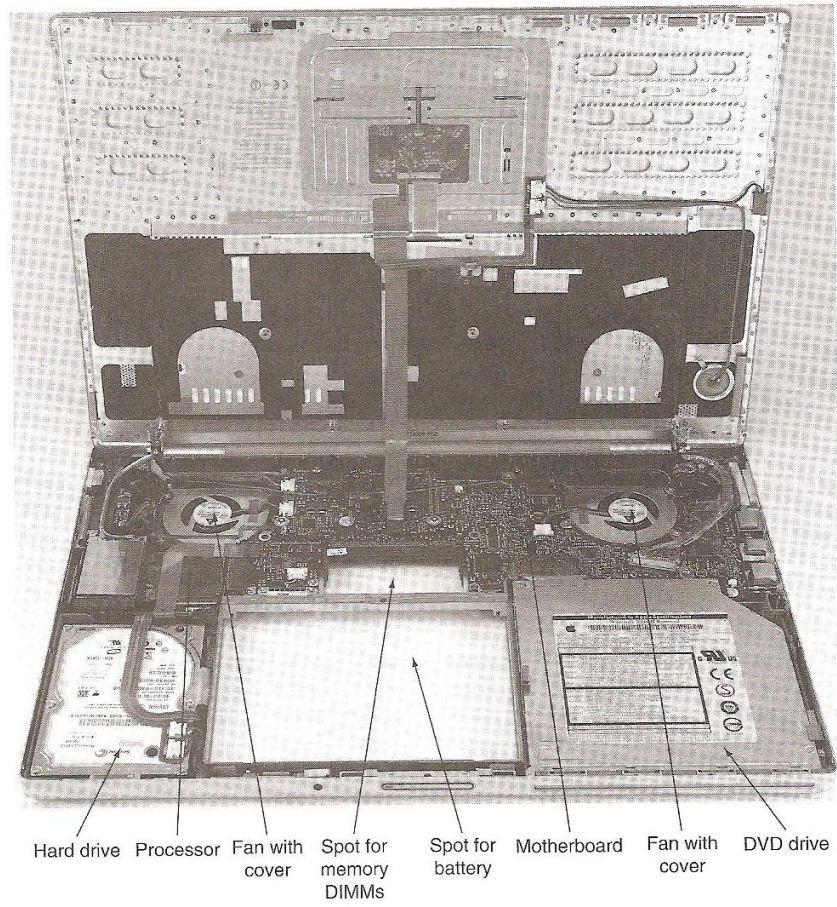

High Level Language to Binary machine code example


High-level
language
program
(in C)

```
swap(int v[], int k)
{int temp;
  temp = v[k];
  v[k] = v[k+1];
  v[k+1] = temp;
}
```



Assembly
language
program
(for MIPS)

```
swap:
  muli $2, $5, 4
  add $2, $4, $2
  lw $15, 0($2)
  lw $16, 4($2)
  sw $16, 0($2)
  sw $15, 4($2)
  jr $31
```



Binary machine
language
program
(for MIPS)

```
000000001010000100000000000011000
00000000000110000001100000100001
10001100011000100000000000000000
10001100111100100000000000000100
10101100111100100000000000000000
10101100011000100000000000000100
00000011111000000000000000001000
```