

SQL: Queries, Programming, Triggers

Chapter 5

Example Instances

- We will use these instances of the Sailors and Reserves relations in our examples.
- If the key for the Reserves relation contained only the attributes *sid* and *bid*, how would the semantics differ?

R1

sid	bid	day
22	101	10/10/96
58	103	11/12/96

S1

sid	sname	rating	age
22	dustin	7	45.0
31	lubber	8	55.5
58	rusty	10	35.0

S2

sid	sname	rating	age
28	yuppy	9	35.0
31	lubber	8	55.5
44	guppy	5	35.0
58	rusty	10	35.0

Basic SQL Query

SELECT	[DISTINCT] *target-list*
FROM	*relation-list*
WHERE	*qualification*

- *relation-list* A list of relation names (possibly with a *range-variable* after each name).
- *target-list* A list of attributes of relations in *relation-list*
- *qualification* Comparisons (Attr *op* const or Attr1 *op* Attr2, where *op* is one of $<, >, =, \leq, \geq, \neq$) combined using AND, OR and NOT.
- DISTINCT is an optional keyword indicating that the answer should not contain duplicates. Default is that duplicates are *not* eliminated!

Conceptual Evaluation Strategy

- Semantics of an SQL query defined in terms of the following conceptual evaluation strategy:
  - Compute the cross-product of *relation-list*.
  - Discard resulting tuples if they fail *qualifications*.
  - Delete attributes that are not in *target-list*.
  - If DISTINCT is specified, eliminate duplicate rows.
- This strategy is probably the least efficient way to compute a query! An optimizer will find more efficient strategies to compute *the same answers*.

Example of Conceptual Evaluation

```
SELECT  S.sname
FROM    Sailors S, Reserves R
WHERE   S.sid=R.sid AND R.bid=103
```

(sid)	sname	rating	age	(sid)	bid	day
22	dustin	7	45.0	22	101	10/10/96
22	dustin	7	45.0	58	103	11/12/96
31	lubber	8	55.5	22	101	10/10/96
31	lubber	8	55.5	58	103	11/12/96
58	rusty	10	35.0	22	101	10/10/96
58	rusty	10	35.0	58	103	11/12/96

A Note on Range Variables

- Really needed only if the same relation appears twice in the FROM clause. The previous query can also be written as:

```
SELECT  S.sname
FROM    Sailors S, Reserves R
WHERE   S.sid=R.sid AND bid=103
```

OR

```
SELECT  sname
FROM    Sailors, Reserves
WHERE   Sailors.sid=Reserves.sid
        AND bid=103
```

It is good style, however, to use range variables always!

Find sailors who've reserved at least one boat

```
SELECT  S.sid
FROM  Sailors S, Reserves R
WHERE  S.sid=R.sid
```

- Would adding DISTINCT to this query make a difference?
- What is the effect of replacing *S.sid* by *S.sname* in the SELECT clause? Would adding DISTINCT to this variant of the query make a difference?

Expressions and Strings

```
SELECT  S.age, age1=S.age-5, 2*S.age AS age2
FROM  Sailors S
WHERE  S.sname LIKE 'B_%B'
```

- Illustrates use of arithmetic expressions and string pattern matching: *Find triples (of ages of sailors and two fields defined by expressions) for sailors whose names begin and end with B and contain at least three characters.*
- AS and = are two ways to name fields in result.
- LIKE is used for string matching. '_' stands for any one character and `%' stands for 0 or more arbitrary characters.

Find sid's of sailors who've reserved a red or a green boat

- UNION: Can be used to compute the union of any two *union-compatible* sets of tuples (which are themselves the result of SQL queries).
- If we replace OR by AND in the first version, what do we get?
- Also available: EXCEPT (What do we get if we replace UNION by EXCEPT?)

```
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND R.bid=B.bid
  AND (B.color='red' OR B.color='green')
```

```
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND
R.bid=B.bid
            AND B.color='red'
UNION
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND
R.bid=B.bid
            AND B.color='green'
```

Find sid's of sailors who've reserved a red and a green boat

- INTERSECT: Can be used to compute the intersection of any two *union-compatible* sets of tuples.
- Included in the SQL/92 standard, but some systems don't support it.
- Contrast symmetry of the UNION and INTERSECT queries with how much the other versions differ.

```
SELECT  S.sid
FROM  Sailors S, Boats B1, Reserves R1,
        Boats B2, Reserves R2
WHERE  S.sid=R1.sid AND R1.bid=B1.bid
 AND  S.sid=R2.sid AND R2.bid=B2.bid
 AND (B1.color='red' AND B2.color='green')
```

Key field!

```
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND
R.bid=B.bid
            AND B.color='red'
INTERSECT
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND
R.bid=B.bid
```

Nested Queries

Find names of sailors who've reserved boat #103:

```
SELECT  S.sname
FROM  Sailors S
WHERE  S.sid IN  (SELECT  R.sid
                  FROM  Reserves R
                  WHERE  R.bid=103)
```

- A very powerful feature of SQL: a WHERE clause can itself contain an SQL query! (Actually, so can FROM and HAVING clauses.)
- To find sailors who've *not* reserved #103, use NOT IN.
- To understand semantics of nested queries, think of a *nested loops* evaluation: *For each Sailors tuple, check the qualification by computing the subquery.*

Nested Queries with Correlation

Find names of sailors who've reserved boat #103:

```
SELECT  S.sname
FROM  Sailors S
WHERE  EXISTS  (SELECT  *
                FROM  Reserves R
                WHERE  R.bid=103 AND S.sid=R.sid)
```

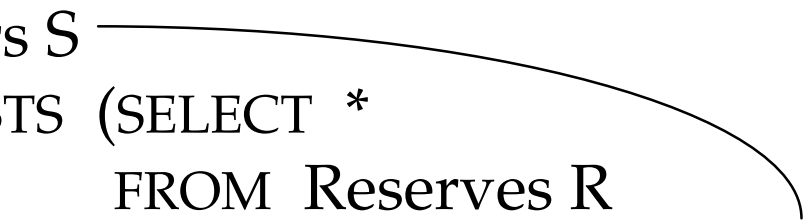

- EXISTS is another set comparison operator, like IN.
- If UNIQUE is used, and * is replaced by *R.bid*, finds sailors with at most one reservation for boat #103. (UNIQUE checks for duplicate tuples; * denotes all attributes. Why do we have to replace * by *R.bid*?)
- Illustrates why, in general, subquery must be re-computed for each Sailors tuple.

More on Set-Comparison Operators

- We've already seen IN, EXISTS and UNIQUE. Can also use NOT IN, NOT EXISTS and NOT UNIQUE.
- Also available: *op* ANY, *op* ALL, *op* IN >,<,=,≥,≤,≠
- Find sailors whose rating is greater than that of some sailor called Horatio:

```
SELECT  *
FROM  Sailors S
WHERE  S.rating > ANY  (SELECT  S2.rating
                        FROM  Sailors S2
                        WHERE S2.sname='Horatio')
```

Rewriting INTERSECT Queries Using IN

Find sid's of sailors who've reserved both a red and a green boat:

```
SELECT  S.sid
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND R.bid=B.bid AND B.color='red'
        AND S.sid IN  (SELECT  S2.sid
                       FROM  Sailors S2, Boats B2, Reserves R2
                       WHERE  S2.sid=R2.sid AND R2.bid=B2.bid
                              AND  B2.color='green')
```

- Similarly, EXCEPT queries re-written using NOT IN.
- To find *names* (not *sid*'s) of Sailors who've reserved both red and green boats, just replace *S.sid* by *S.sname* in SELECT clause. (What about INTERSECT query?)

Division in SQL

(1)
```
SELECT  S.sname
FROM  Sailors S
WHERE  NOT EXISTS
          ((SELECT  B.bid
            FROM  Boats B)
           EXCEPT
            (SELECT  R.bid
             FROM  Reserves R
             WHERE  R.sid=S.sid))
```

Find sailors who've reserved all boats.

- Let's do it the hard way, without EXCEPT:

(2)
```
SELECT  S.sname
FROM  Sailors S
WHERE  NOT EXISTS  (SELECT  B.bid
                    FROM  Boats B
                    WHERE  NOT EXISTS  (SELECT  R.bid
                                        FROM  Reserves R
                                        WHERE  R.bid=B.bid
                                        AND R.sid=S.sid))
```

Sailors S such that ...

there is no boat B without ...

a Reserves tuple showing S reserved B

Aggregate Operators

- Significant extension of relational algebra.

COUNT (*)
COUNT ([DISTINCT] A)
SUM ([DISTINCT] A)
AVG ([DISTINCT] A)
MAX (A)
MIN (A)

single column

```
SELECT  COUNT (*)
FROM  Sailors S
```

```
SELECT  AVG (S.age)
FROM  Sailors S
WHERE  S.rating=10
```

```
SELECT  S.sname
FROM  Sailors S
WHERE  S.rating= (SELECT  MAX(S2.rating)
                  FROM  Sailors S2)
```

```
SELECT  COUNT (DISTINCT S.rating)
FROM  Sailors S
WHERE S.sname='Bob'
```

```
SELECT  AVG ( DISTINCT S.age)
FROM  Sailors S
WHERE  S.rating=10
```

Find name and age of the oldest sailor(s)

- The first query is illegal! (We'll look into the reason a bit later, when we discuss GROUP BY.)
- The third query is equivalent to the second query, and is allowed in the SQL/92 standard, but is not supported in some systems.

```
SELECT  S.sname, MAX (S.age)
FROM  Sailors S
```

```
SELECT  S.sname, S.age
FROM  Sailors S
WHERE  S.age =
          (SELECT  MAX (S2.age)
           FROM  Sailors S2)
```

```
SELECT  S.sname, S.age
FROM  Sailors S
WHERE  (SELECT  MAX (S2.age)
           FROM  Sailors S2)
           = S.age
```

GROUP BY and HAVING

- So far, we've applied aggregate operators to all (qualifying) tuples. Sometimes, we want to apply them to each of several *groups* of tuples.
- Consider: *Find the age of the youngest sailor for each rating level.*
  - In general, we don't know how many rating levels exist, and what the rating values for these levels are!
  - Suppose we know that rating values go from 1 to 10; we can write 10 queries that look like this (!):

For i = 1, 2, ... , 10:

```
SELECT  MIN (S.age)
FROM  Sailors S
WHERE  S.rating = i
```

Queries With GROUP BY and HAVING

```
SELECT      [DISTINCT] target-list
FROM        relation-list
WHERE       qualification
GROUP BY    grouping-list
HAVING      group-qualification
```

- The *target-list* contains (i) attribute names (ii) terms with aggregate operations (e.g., MIN (*S.age*)).
  - The attribute list (i) must be a subset of *grouping-list*. Intuitively, each answer tuple corresponds to a *group*, and these attributes must have a single value per group. (A *group* is a set of tuples that have the same value for all attributes in *grouping-list*.)

Conceptual Evaluation

- The cross-product of *relation-list* is computed, tuples that fail *qualification* are discarded, '*unnecessary*' fields are deleted, and the remaining tuples are partitioned into groups by the value of attributes in *grouping-list*.
- The *group-qualification* is then applied to eliminate some groups. Expressions in *group-qualification* must have a *single value per group*!
  - In effect, an attribute in *group-qualification* that is not an argument of an aggregate op also appears in *grouping-list*. (SQL does not exploit primary key semantics here!)
- One answer tuple is generated per qualifying group.

Find the age of the youngest sailor with age ≥ 18, for each rating with at least 2 such sailors

```
SELECT  S.rating,  MIN (S.age)
FROM  Sailors S
WHERE  S.age >= 18
GROUP BY  S.rating
HAVING  COUNT (*) > 1
```

sid	sname	rating	age
22	dustin	7	45.0
31	lubber	8	55.5
71	zorba	10	16.0
64	horatio	7	35.0
29	brutus	1	33.0
58	rusty	10	35.0

- Only S.rating and S.age are mentioned in the SELECT, GROUP BY or HAVING clauses; other attributes '*unnecessary*'.
- 2nd column of result is unnamed. (Use AS to name it.)

rating	age
1	33.0
7	45.0
7	35.0
8	55.5
10	35.0

rating	
7	35.0

Answer relation

For each red boat, find the number of reservations for this boat

```
SELECT  B.bid,  COUNT (*) AS scount
FROM  Sailors S, Boats B, Reserves R
WHERE  S.sid=R.sid AND R.bid=B.bid AND B.color='red'
GROUP BY  B.bid
```

- Grouping over a join of three relations.
- What do we get if we remove *B.color='red'* from the WHERE clause and add a HAVING clause with this condition?
- What if we drop Sailors and the condition involving S.sid?

Find the age of the youngest sailor with age > 18, for each rating with at least 2 sailors (of any age)

```
SELECT  S.rating,  MIN (S.age)
FROM  Sailors S
WHERE  S.age > 18
GROUP BY  S.rating
HAVING  1  <  (SELECT  COUNT (*)
               FROM  Sailors S2
               WHERE  S.rating=S2.rating)
```

- Shows HAVING clause can also contain a subquery.
- Compare this with the query where we considered only ratings with 2 sailors over 18!
- What if HAVING clause is replaced by:
  - HAVING COUNT(*) >1

Find those ratings for which the average age is the minimum over all ratings

- Aggregate operations cannot be nested! WRONG:

```
SELECT S.rating
FROM Sailors S
WHERE S.age = (SELECT MIN (AVG (S2.age)) FROM Sailors S2)
```

- Correct solution (in SQL/92):

```
SELECT Temp.rating, Temp.avgage
FROM (SELECT S.rating, AVG (S.age) AS avgage
      FROM Sailors S
      GROUP BY S.rating) AS Temp
WHERE Temp.avgage = (SELECT MIN (Temp.avgage)
                     FROM Temp)
```

Null Values

- Field values in a tuple are sometimes *unknown* (e.g., a rating has not been assigned) or *inapplicable* (e.g., no spouse's name).
  - SQL provides a special value *null* for such situations.
- The presence of *null* complicates many issues. E.g.:
  - Special operators needed to check if value is/is not *null*.
  - Is *rating*>*8* true or false when *rating* is equal to *null*? What about AND, OR and NOT connectives?
  - We need a 3-valued logic (true, false and *unknown*).
  - Meaning of constructs must be defined carefully. (e.g., WHERE clause eliminates rows that don't evaluate to true.)
  - New operators (in particular, *outer joins*) possible/needed.

Embedded SQL

- SQL commands can be called from within a host language (e.g., C or COBOL) program.
  - SQL statements can refer to host variables (including special variables used to return status).
  - Must include a statement to *connect* to the right database.
- SQL relations are (multi-) sets of records, with no *a priori* bound on the number of records. No such data structure in C.
  - SQL supports a mechanism called a *cursor* to handle this.



Cursors

- Can declare a cursor on a relation or query statement (which generates a relation).
- Can *open* a cursor, and repeatedly *fetch* a tuple then *move* the cursor, until all tuples have been retrieved.
  - Can use a special clause, called ORDER BY, in queries that are accessed through a cursor, to control the order in which tuples are returned.
    - Fields in ORDER BY clause must also appear in SELECT clause.
  - The ORDER BY clause, which orders answer tuples, is *only* allowed in the context of a cursor.
- Can also modify/delete tuple pointed to by a cursor.

Cursor that gets names of sailors who've reserved a red boat, in alphabetical order

```
EXEC SQL DECLARE sinfo CURSOR FOR
        SELECT  S.sname
        FROM  Sailors S, Boats B, Reserves R
        WHERE  S.sid=R.sid AND R.bid=B.bid AND B.color='red'
        ORDER BY  S.sname
```

- Note that it is illegal to replace *S.sname* by, say, *S.sid* in the ORDER BY clause! (Why?)
- Can we add *S.sid* to the SELECT clause and replace *S.sname* by *S.sid* in the ORDER BY clause?

Embedding SQL in C: An Example

```
char SQLSTATE[6];
EXEC SQL BEGIN DECLARE SECTION
char c_sname[20]; short c_minrating; float c_age;
EXEC SQL END DECLARE SECTION
c_minrating = random();
EXEC SQL DECLARE sinfo CURSOR FOR
  SELECT S.sname, S.age FROM Sailors S
  WHERE S.rating > :c_minrating
  ORDER BY S.sname;
do {
  EXEC SQL FETCH sinfo INTO :c_sname, :c_age;
  printf("%s is %d years old\n", c_sname, c_age);
} while (SQLSTATE != '02000');
EXEC SQL CLOSE sinfo;
```

Database APIs: Alternative to embedding

Rather than modify compiler, add library with database calls (API)

- special standardized interface: procedures/objects
- passes SQL strings from language, presents result sets in a language-friendly way
- Microsoft's *ODBC* becoming C/C++ standard on Windows
- Sun's *JDBC* a Java equivalent
- Supposedly DBMS-neutral
  - a "driver" traps the calls and translates them into DBMS-specific code
  - database can be across a network

SQL API in Java (JDBC)

```
Connection con = // connect
   DriverManager.getConnection(url, ”login", ”pass");
Statement stmt = con.createStatement(); // set up stmt
String query = "SELECT name, rating FROM Sailors";
ResultSet rs = stmt.executeQuery(query);
try { // handle exceptions
    // loop through result tuples
    while (rs.next()) {
        String s = rs.getString(“name");
        Int n = rs.getFloat(“rating");
        System.out.println(s + "   " + n);
    }
} catch(SQLException ex) {
    System.out.println(ex.getMessage ()
        + ex.getSQLState () + ex.getErrorCode ());
}
```

Integrity Constraints (Review)

- An IC describes conditions that every *legal instance* of a relation must satisfy.
  - Inserts/deletes/updates that violate IC's are disallowed.
  - Can be used to ensure application semantics (e.g., *sid* is a key), or prevent inconsistencies (e.g., *sname* has to be a string, *age* must be < 200)
- *Types of IC's*: Domain constraints, primary key constraints, foreign key constraints, general constraints.
  - *Domain constraints*: Field values must be of right type. Always enforced.

General Constraints

- Useful when more general ICs than keys are involved.
- Can use queries to express constraint.
- Constraints can be named.

```
CREATE TABLE Sailors
        ( sid INTEGER,
        sname CHAR(10),
        rating INTEGER,
        age REAL,
        PRIMARY KEY (sid),
        CHECK ( rating >= 1
                AND rating <= 10 )

CREATE TABLE Reserves
        ( sname CHAR(10),
        bid INTEGER,
        day DATE,
        PRIMARY KEY (bid,day),
        CONSTRAINT noInterlakeRes
        CHECK (`Interlake' <>
                ( SELECT B.bname
                FROM Boats B
                WHERE B.bid=bid)))
```

Constraints Over Multiple Relations

```
CREATE TABLE Sailors
( sid INTEGER,
  sname CHAR(10),
  rating INTEGER,
  age REAL,
  PRIMARY KEY (sid),
  CHECK
  ( (SELECT COUNT (S.sid) FROM Sailors S)
  + (SELECT COUNT (B.bid) FROM Boats B) < 100 )
```

Number of boats plus number of sailors is < 100

- Awkward and wrong!
- If Sailors is empty, the number of Boats tuples can be anything!
- ASSERTION is the right solution; not associated with either table.

```
CREATE ASSERTION smallClub
CHECK
( (SELECT COUNT (S.sid) FROM Sailors S)
+ (SELECT COUNT (B.bid) FROM Boats B) < 100
```

Triggers

- Trigger: procedure that starts automatically if specified changes occur to the DBMS
- Three parts:
  - Event (activates the trigger)
  - Condition (tests whether the triggers should run)
  - Action (what happens if the trigger runs)

Triggers: Example (SQL:1999)

```
CREATE TRIGGER youngSailorUpdate
    AFTER INSERT ON SAILORS
REFERENCING NEW TABLE NewSailors
FOR EACH STATEMENT
    INSERT
        INTO YoungSailors(sid, name, age, rating)
        SELECT sid, name, age, rating
        FROM NewSailors N
        WHERE N.age <= 18
```

Summary

- SQL was an important factor in the early acceptance of the relational model; more natural than earlier, procedural query languages.
- Relationally complete; in fact, significantly more expressive power than relational algebra.
- Even queries that can be expressed in RA can often be expressed more naturally in SQL.
- Many alternative ways to write a query; optimizer should look for most efficient evaluation plan.
  - In practice, users need to be aware of how queries are optimized and evaluated for best results.

Summary (Contd.)

- NULL for unknown field values brings many complications
- Embedded SQL allows execution within a host language; cursor mechanism allows retrieval of one record at a time
- APIs such as ODBC and ODBC introduce a layer of abstraction between application and DBMS
- SQL allows specification of rich integrity constraints
- Triggers respond to changes in the database