

CS 354 - Machine Organization & Programming

Tuesday Feb 20th, and Thursday Feb 22nd, 2024

Midterm Exam - Thurs, Feb 22nd, 7:30 - 9:30 pm

You should have received email with your EXAM INFORMATION including:
DATE, TIME, ROOM, NAME, LECTURE NUMBER, and ID NUMBER,

- ◆ **UW ID required.** Students without UW ID must wait until other students are checked in
- ◆ **Copy or photo of Exam info email**
- ◆ **#2 pencils required**
- ◆ **closed book, no notes, no electronic devices (e.g., calculators, phones, watches)**
- ◆ **see “Midterm Exam 1” on course site Assignments for topics**

A05 submit copy of e1_cheatsheet.pdf to your activities directory

PM BYOL: Exam Review

Project p2B: Due on or before Friday, Feb 23rd

Homework hw2: Due on Monday 2/19 (solution available Wed morning)

<p>This Week: Linux: Processes and Address Spaces Posix <code>brk</code> & <code>unistd.h</code> C's Heap Allocator & <code>stdlib.h</code></p> <p>Meet the Heap Allocator Design Simple View of Heap</p>	<p>Free Block Organization Implicit Free List Placement Policies</p> <p>MIDTERM EXAM 1</p>
<p>Next Week: Dynamic Memory Allocator options Read for next week: B&O 9.9.7 Placing Allocated Blocks 9.9.8 Splitting Free Blocks 9.9.9 Getting Additional Heap Memory 9.9.10 Coalescing Free Blocks</p>	<p>9.9.11 Coalescing with Boundary Tags 9.9.12 Putting It Together: Implementing a Simple Allocator 9.9.13 Explicit Free Lists 9.9.14 Segregated Free Lists</p>

Posix brk & unistd.h

What? `unistd.h` contains a collection of

Posix API (Portable OS Interface) standard for maintaining compatibility among Unix OS's

DIY Heap via Posix Calls

brk

```
int brk(void *addr)
```

Sets the top of heap to the specified address `addr`.
Returns 0 if successful, else -1 and sets `errno`.

```
void *sbrk(intptr_t incr) //intptr_t is sizeof long for ptr addr
```

Attempts to change the program's top of heap by `incr` bytes.
Returns the old **brk** if successful, else -1 and sets `errno`.

errno

* *For most applications, it's best to use `malloc/calloc/realloc/free`*

* ***Caveat: Using both `malloc/calloc/realloc` and `break` functions above results in undefined program behavior.***

C's Heap Allocator & `stdlib.h`

What? `stdlib.h` contains a collection of

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

C's Heap Allocator Functions

```
void *malloc(size_t size)
```

Allocates and returns generic ptr to block of heap memory of `size` bytes, or returns `NULL` if allocation fails.

```
void *calloc(size_t nItems, size_t size)
```

Allocates, clears to 0, and returns a block of heap memory of `nItems * size` bytes, or returns `NULL` if allocation fails.

```
void *realloc(void *ptr, size_t size)
```

Reallocates to `size` bytes a previously allocated block of heap memory pointed to by `ptr`, or returns `NULL` if reallocation fails.

```
void free(void *ptr)
```

Frees the heap memory pointed to by `ptr`. If `ptr` is `NULL` then does nothing.

*** For CS 354, if `malloc/calloc/realloc` returns `NULL` just exit the program with an appropriate error message.**

Meet the Heap

What? The heap is

◆

dynamically allocated memory:

◆

block:

payload:

overhead:

allocator:

Two Allocator Approaches

1. Implicit:

◆

◆

2. Explicit:

◆

◆

Allocator Design

Two Goals

1. maximize throughput

2. maximize memory utilization

Trade Off:

Requirements

→ List the requirements of a heap allocator.

1.

2.

3.

4.

5.

Design Considerations

◆


◆

◆

◆


Simple View of Heap

Rotated Linear Memory Layout

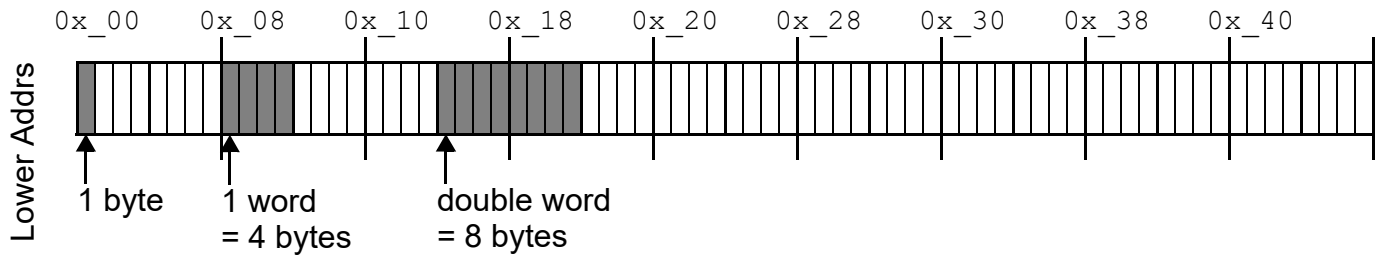

double word alignment:

Run 1: Simple View of Heap Allocation

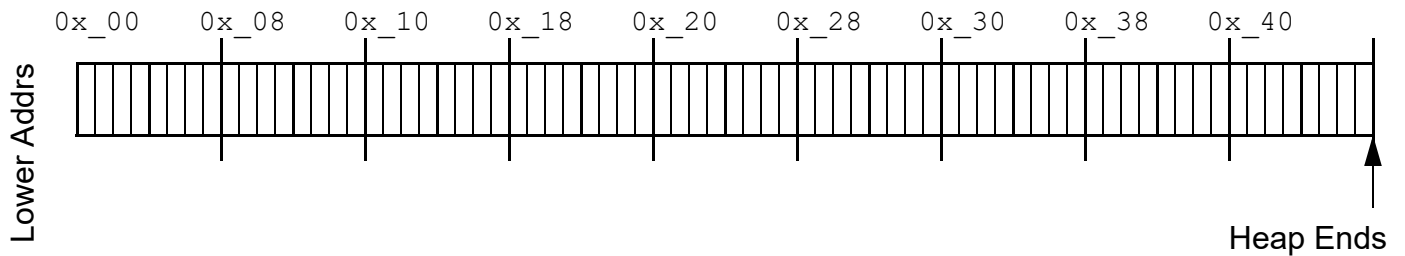

→ Update the diagram to show the following heap allocations:

- 1) `p1 = malloc(2 * sizeof(int));`
- 2) `p2 = malloc(3 * sizeof(char));`
- 3) `p3 = malloc(4 * sizeof(int));`
- 4) `p4 = malloc(5 * sizeof(int));`

→ What happens with the following heap operations:

- 5) `free(p1); p1 = NULL;`
- 6) `free(p3); p3 = NULL;`
- 7) `p5 = malloc(6 * sizeof(int));`

External Fragmentation:

Internal Fragmentation:

➤ Why does it make sense that Java doesn't allow primitives on the heap?

Free Block Organization


* *The simple view of the allocator has*

size

status

Explicit Free List

◆

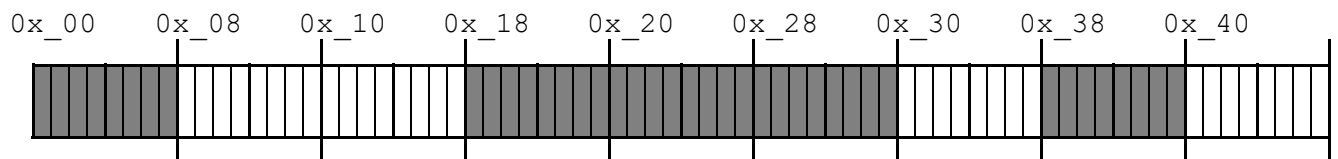

code:

space:

time:

Implicit Free List

◆

code:


space:

time:

Implicit Free List

* *The first word of each block*

Layout 1: Basic Heap Block (3 different memory diagrams of same thing)

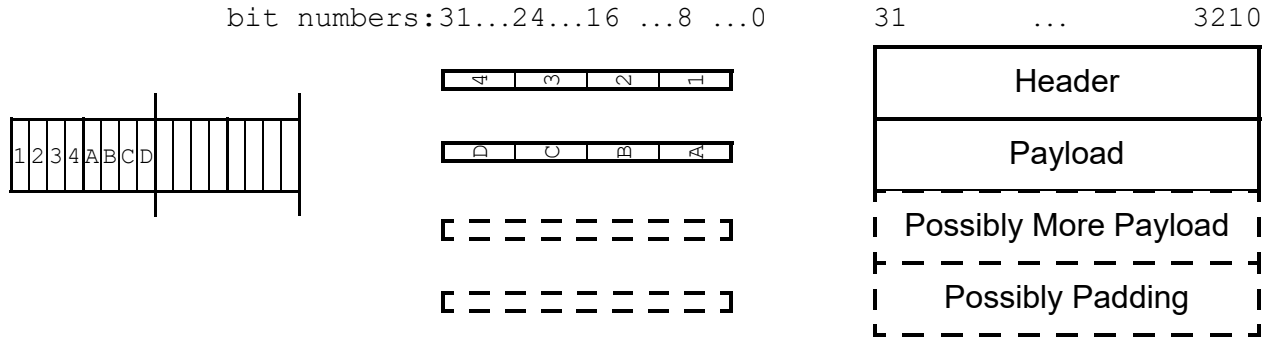

* *The header stores*

→ Since the block size is a multiple of 8, what value will the last three header bits always have?


→ What integer value will the header have for a block that is:

allocated and 8 bytes in size?

free and 32 bytes in size?

allocated and 64 bytes in size?

Run 2: Heap Allocation with Block Headers

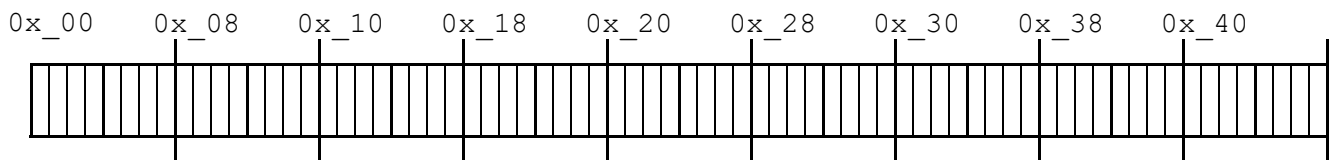

→ Update the diagram to show the following heap allocations:

- 1) `p1 = malloc(2 * sizeof(int));`
- 2) `p2 = malloc(3 * sizeof(char));`
- 3) `p3 = malloc(4 * sizeof(int));`
- 4) `p4 = malloc(5 * sizeof(int));`

→ Given a pointer to the first block in the heap, how is the next block found?

Placement Policies

What? *Placement Policies* are

Assume the heap is pre-divided into various-sized free blocks ordered from smaller to larger.

- ◆ **First Fit (FF):** start from
stop at
fail if

mem util:

thruput:

- ◆ **Next Fit (NF):** start from
stop at
fail if

mem util:

thruput:


- ◆ **Best Fit (BF):** start from
stop at
or stop early
fail if

→

mem util:

thruput:

Run 3: Heap Allocation using Placement Policies

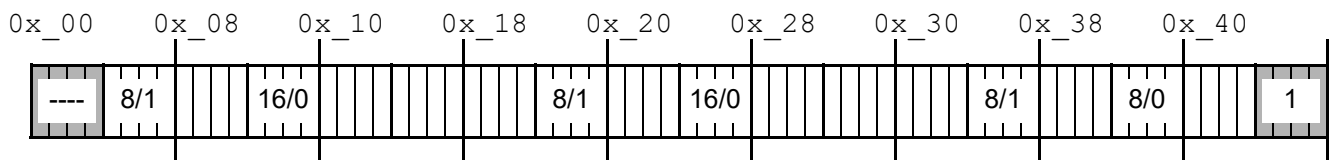

→ Given the original heap above and the placement policy, what address is ptr assigned?

```
ptr = malloc(sizeof(int));           //FF?           BF?
```

```
ptr = malloc(10 * sizeof(char));     //FF?           BF?
```

→ Given the original heap above and the address of block most recently allocated, what address is ptr assigned using NF?

```
ptr = malloc(sizeof(char));          //0x_04?       0x_34?
```

```
ptr = malloc(3 * sizeof(int));       //0x_1C?       0x_34?
```