CS 540 Introduction to Artificial Intelligence

Machine Learning Overview

Spring 2024

Announcements

- **HW3 due on Thursday 15th at 11 AM**
- **Piazza:** https://piazza.com/wisc/spring2024/cd71

CODE: introtoai

Class roadmap:

Tuesday, Feb. 13	**ML Introduction**
Thursday, Feb. 15	ML Unsupervised I
Tuesday, Feb. 20	ML Unsupervised II
Thursday, Feb. 22	Machine Learning: Linear Regression

Machine Learning

Today’s outline

- What is machine learning?
- Supervised Learning
  - Classification
  - Regression
- Unsupervised Learning
  - Clustering
- Reinforcement Learning

Part I: What is machine learning?

HUMANS LEARN FROM
PAST EXPERIENCES

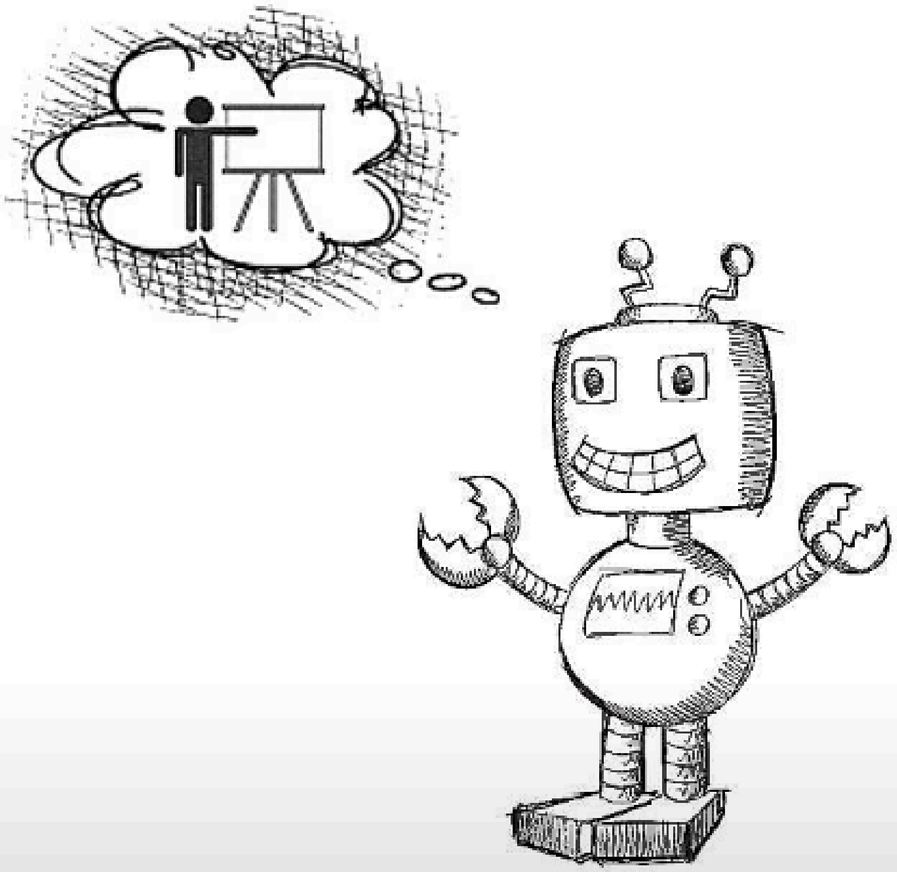

MACHINES FOLLOW INSTRUCTIONS
GIVEN BY HUMANS

What is machine learning?

- Arthur Samuel (1959): Machine learning is the field of study that gives the computer the ability to learn **without being explicitly programmed**.

Without Machine Learning

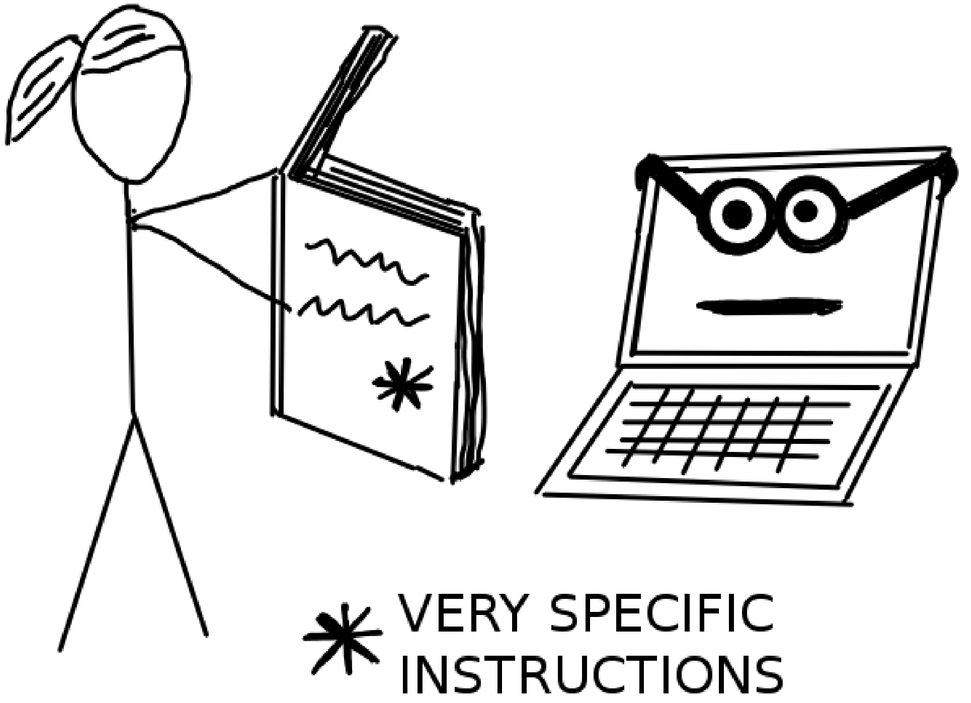

With Machine Learning

https://tung-dn.github.io/programming.html

What is machine learning?

- Arthur Samuel (1959): Machine learning is the field of study that gives the computer the ability to learn **without being explicitly programmed**.

- Tom Mitchell (1997): A computer program is said to learn from **experience E** with respect to some class of **tasks T** and **performance measure P**, if its performance at tasks in T as measured by P, improves with experience E.

Taxonomy of ML

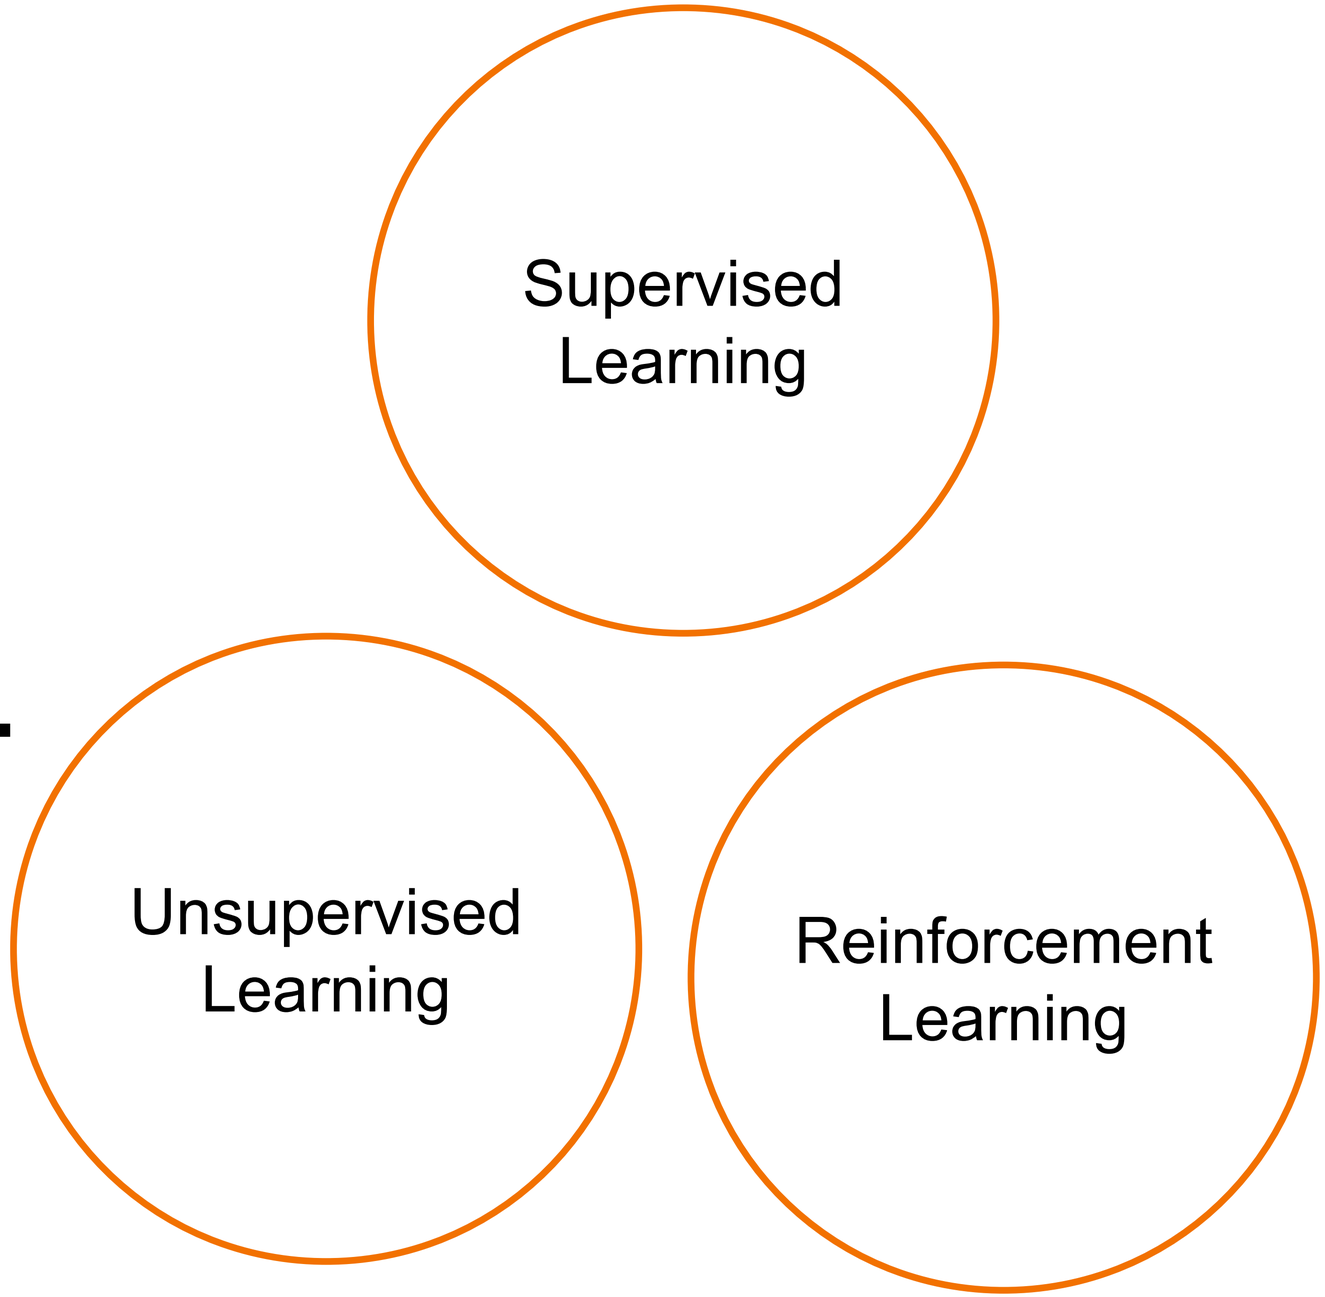

Part II: Supervised Learning

Example 1: Predict whether a user likes a song or not

model

Example 1: Predict whether a user likes a song or not

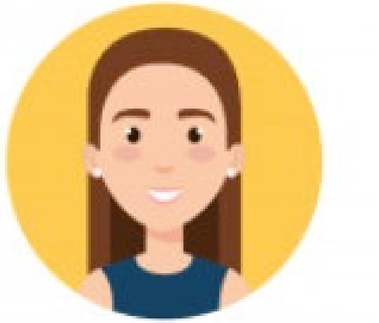

User Sharon

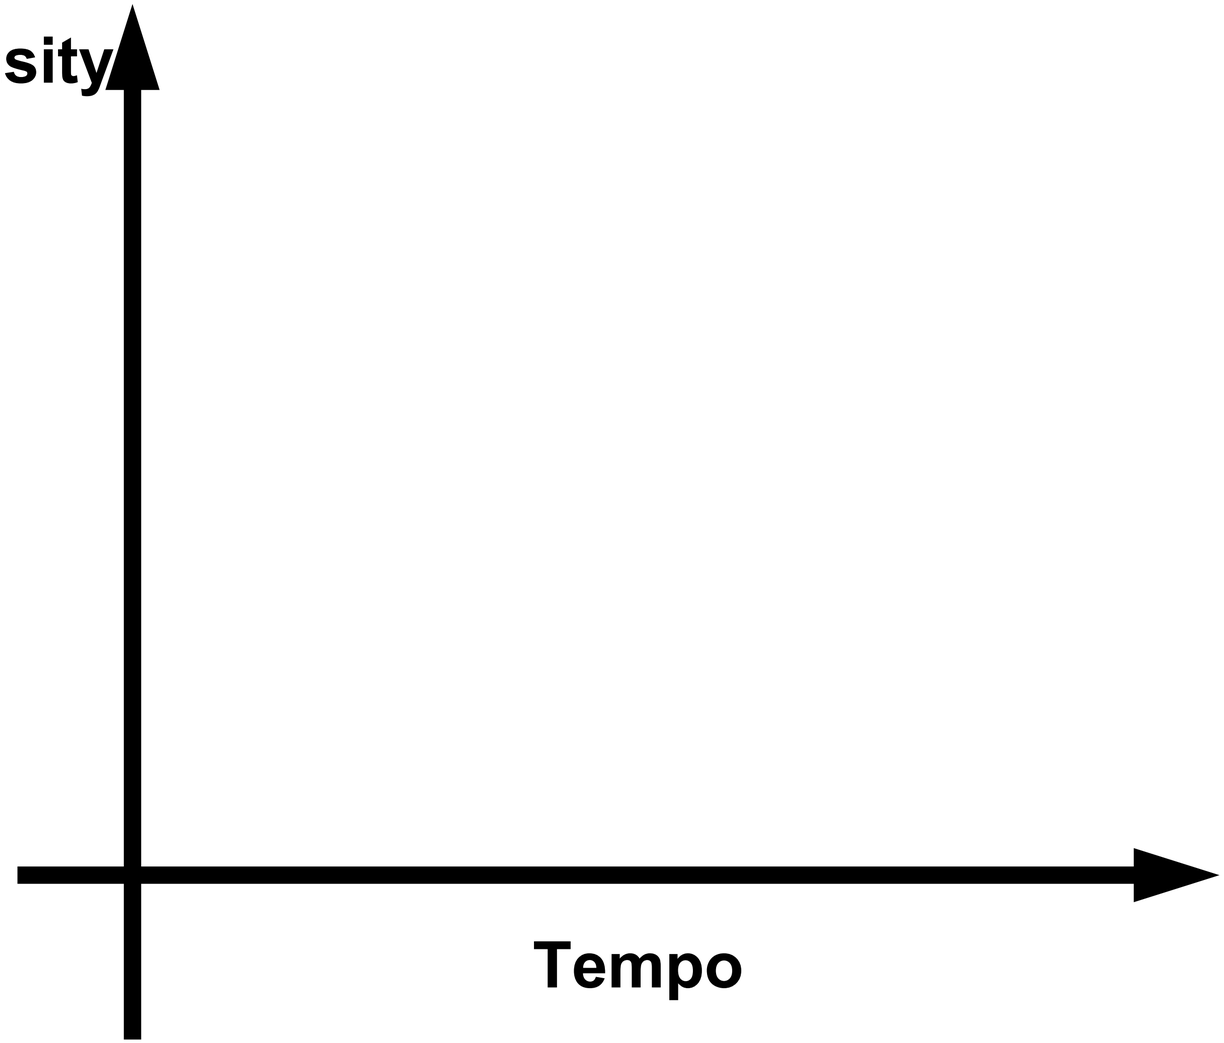

Example 1: Predict whether a user likes a song or not

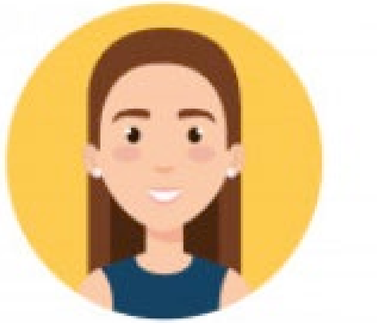

User Sharon

Dislike

Like

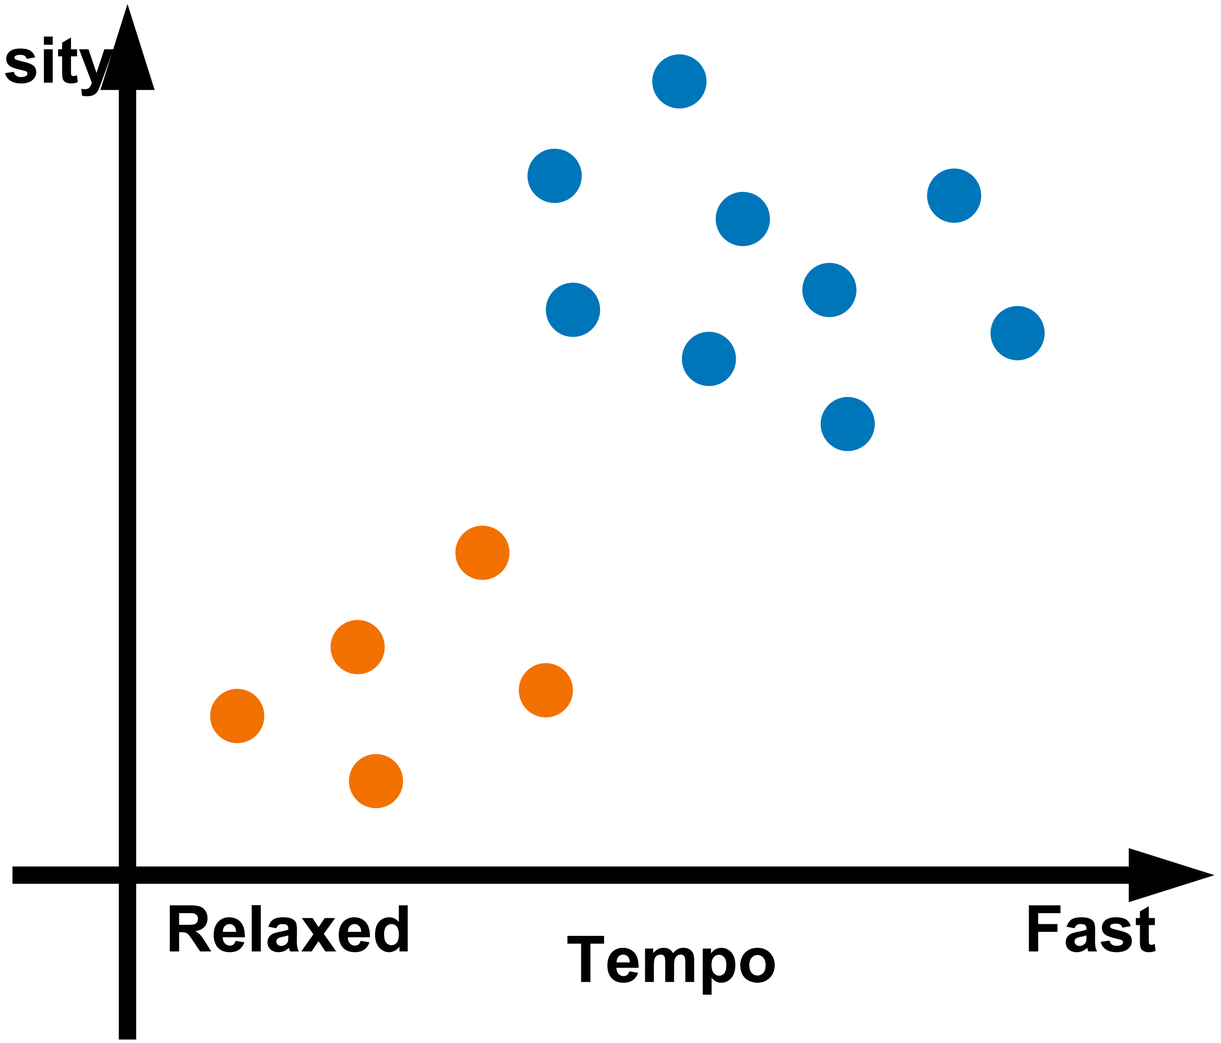

Example 1: Predict whether a user likes a song or not

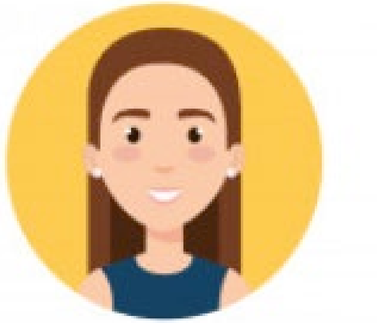

User Sharon

Dislike

Like

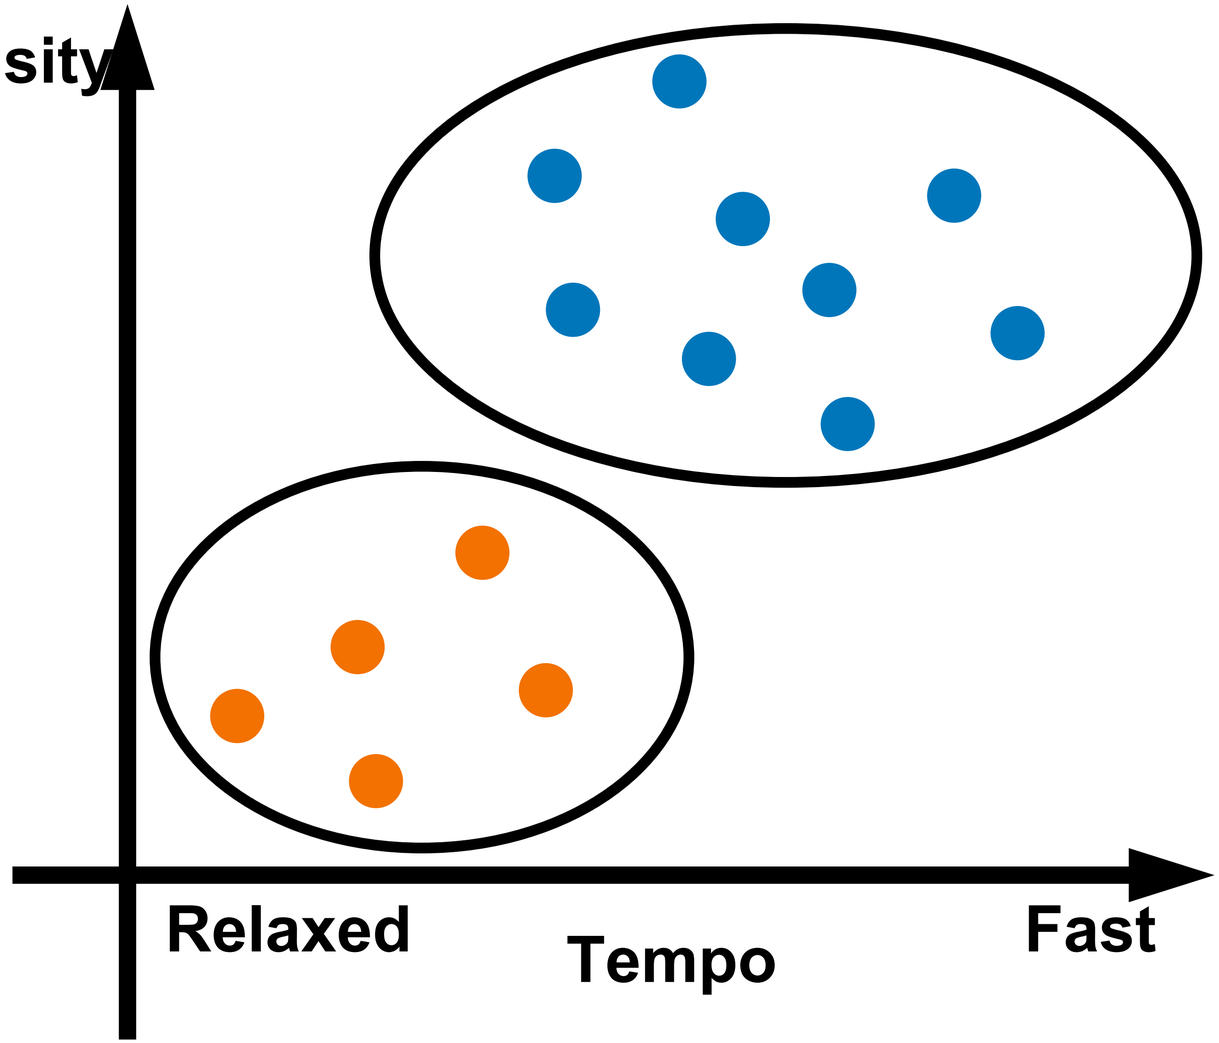

Example 1: Predict whether a user likes a song or not

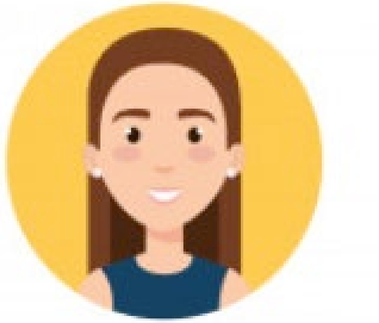

User Sharon

Dislike

Like

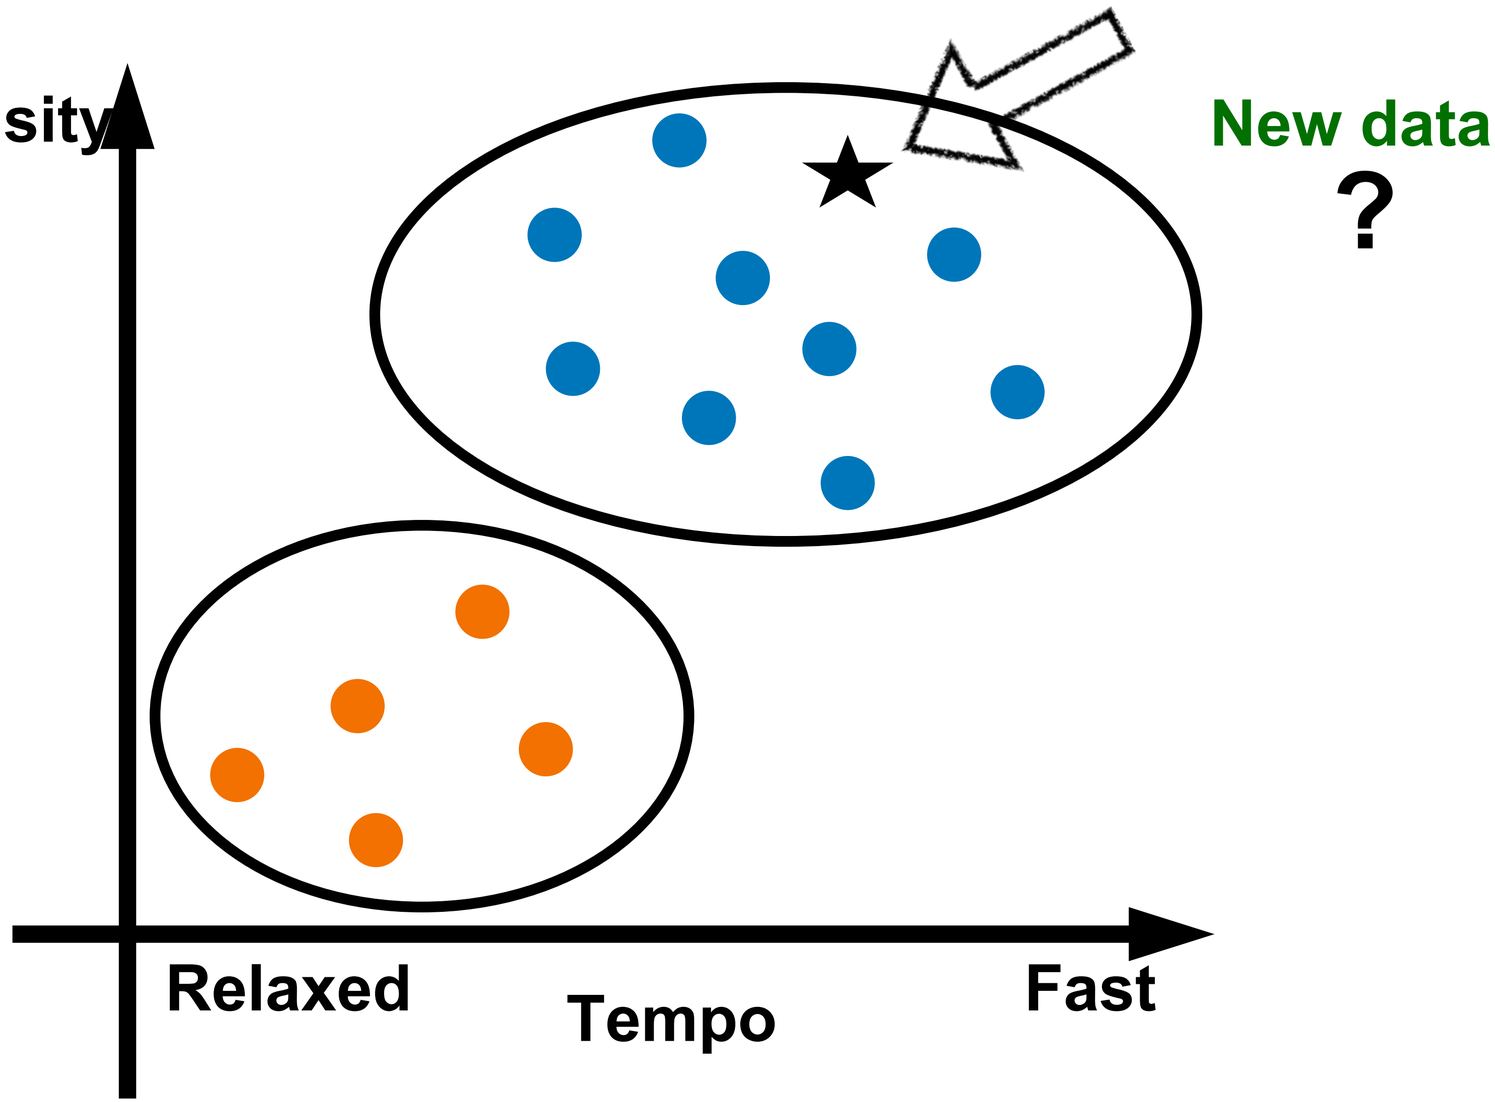

Example 1: Predict whether a user likes a song or not

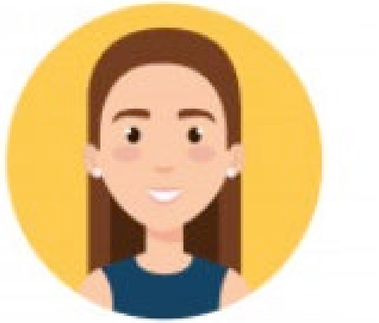

User Sharon

Dislike

Like

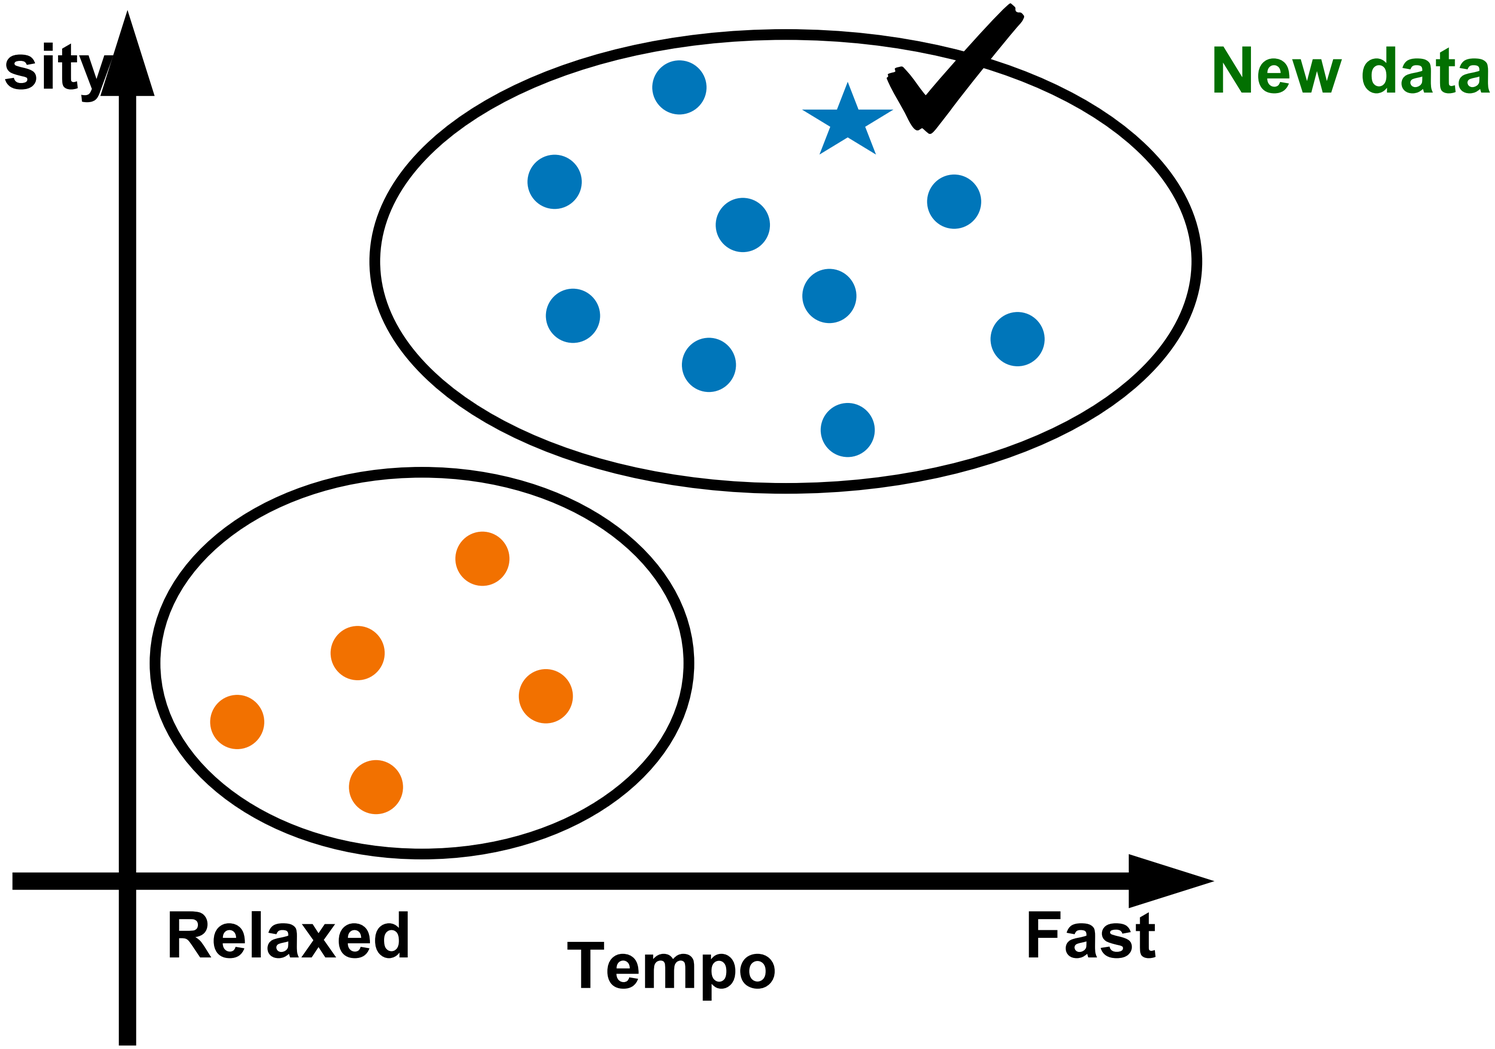

Example 2: Classify Images

http://www.image-net.org/

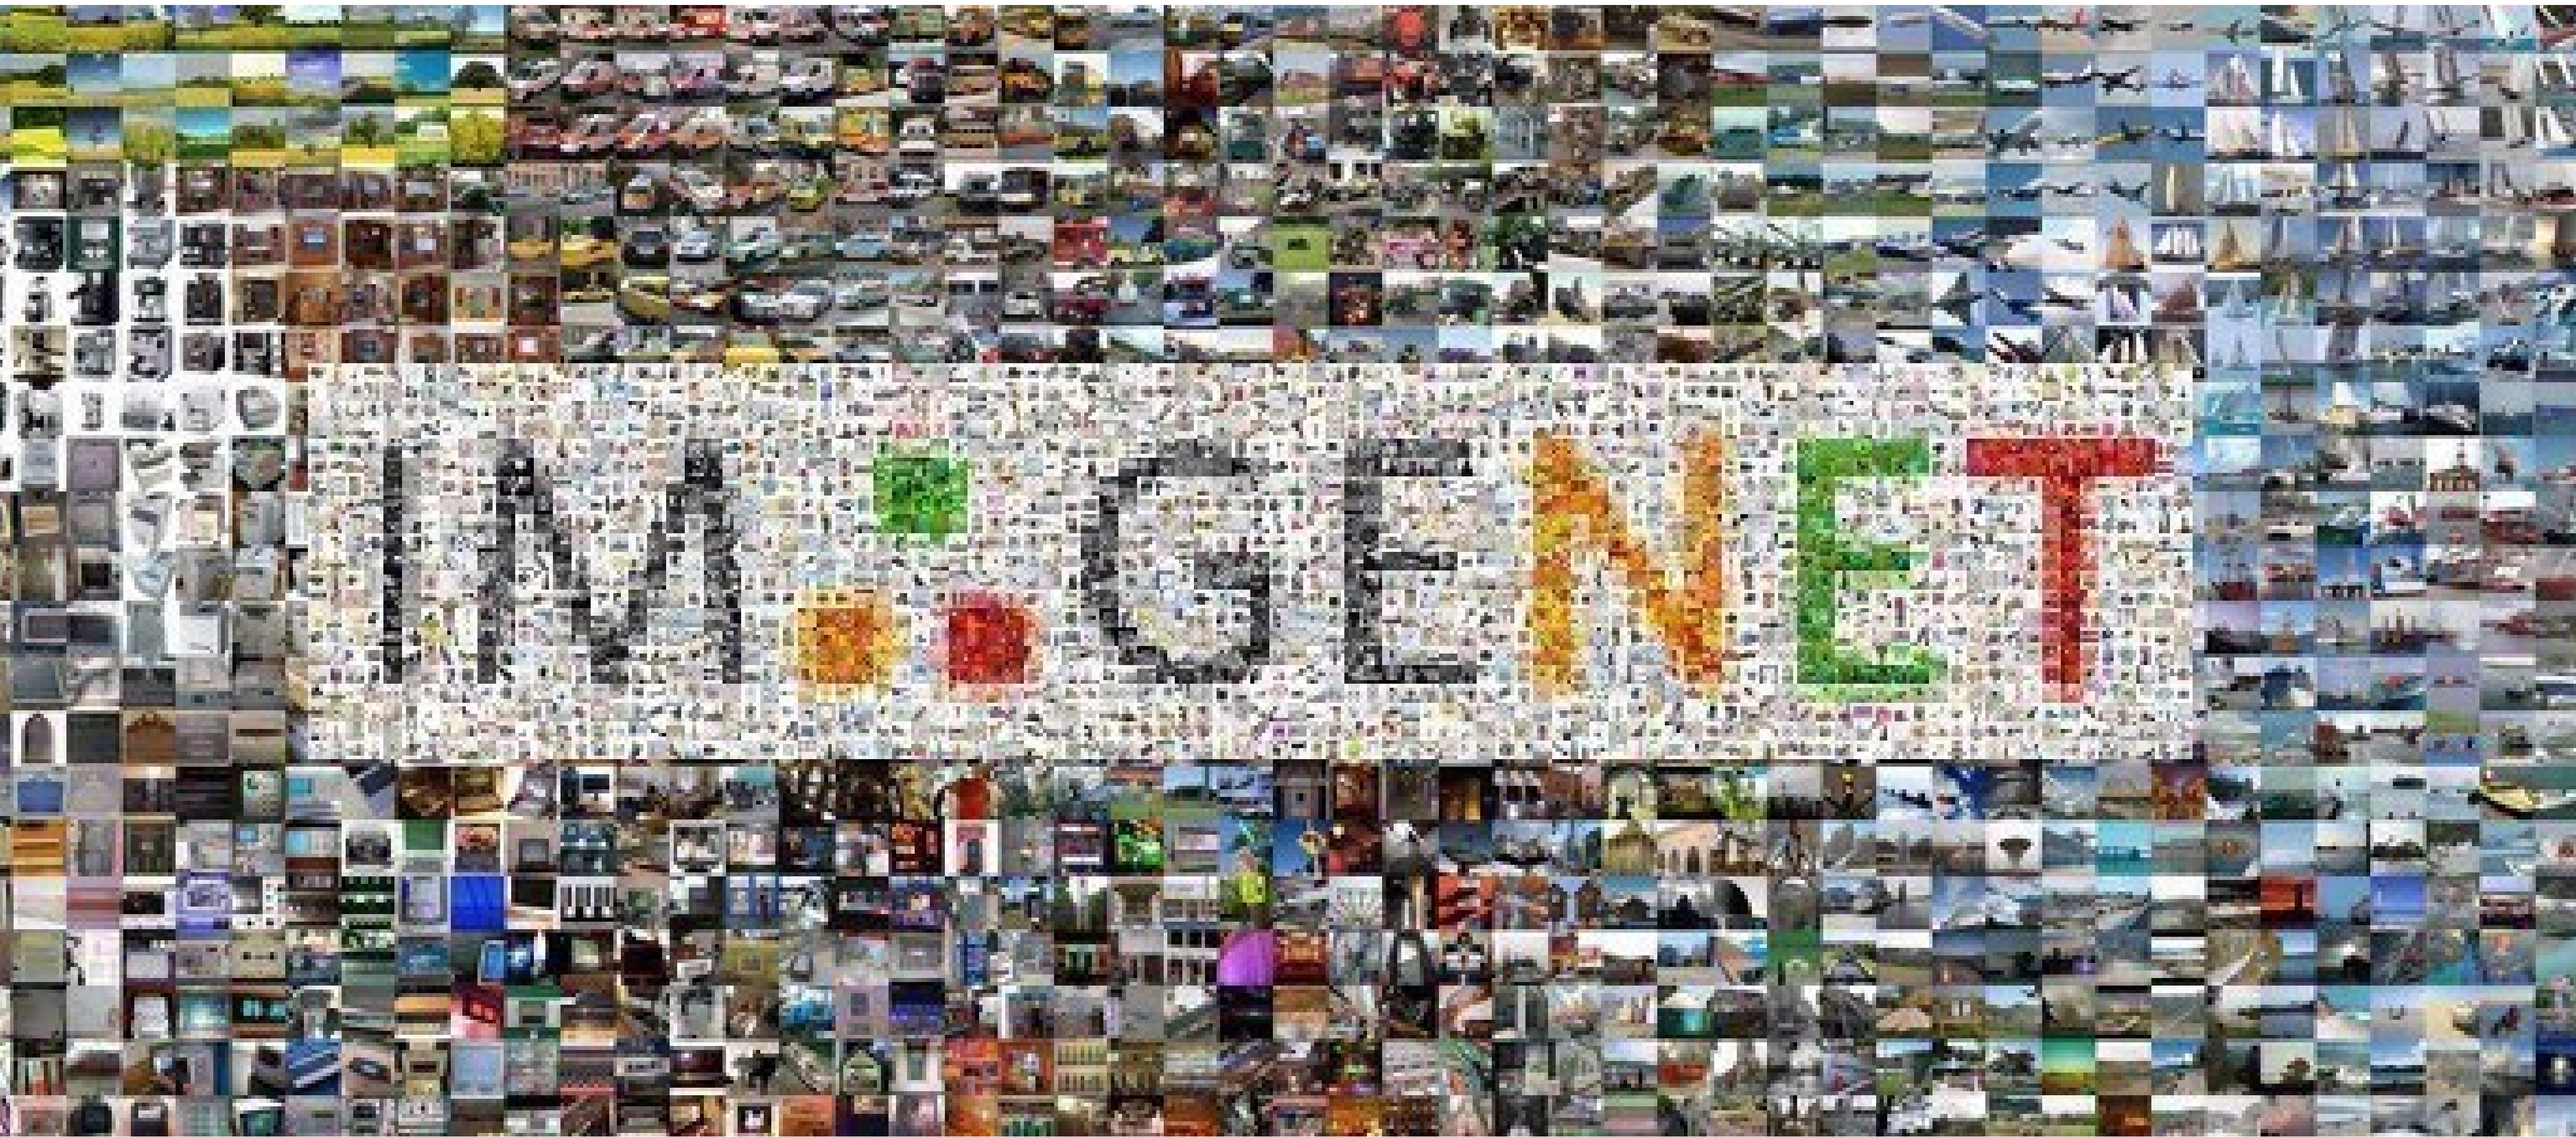

Example 2: Classify Images

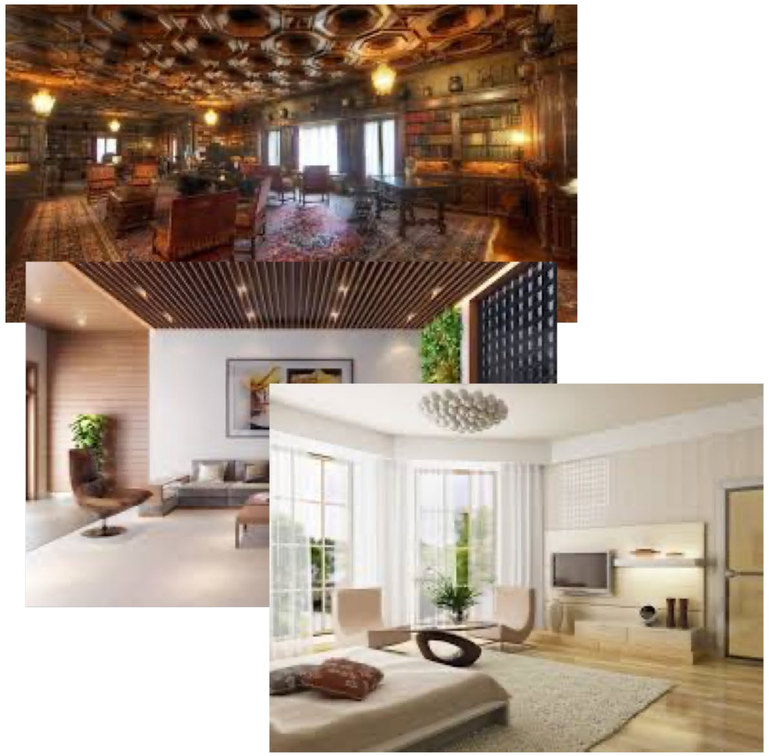

indoor

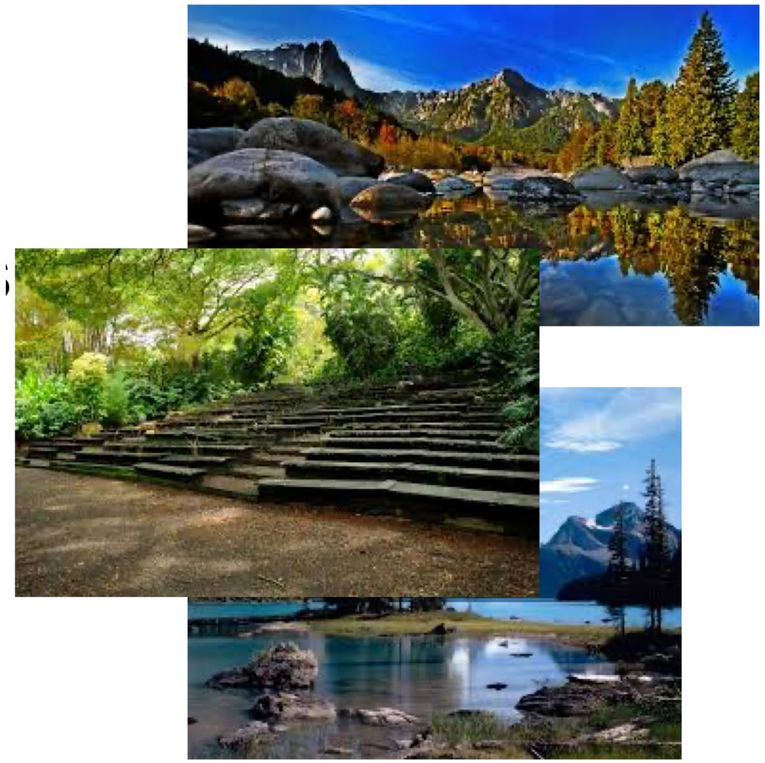

outdoor

Example 2: Classify Images

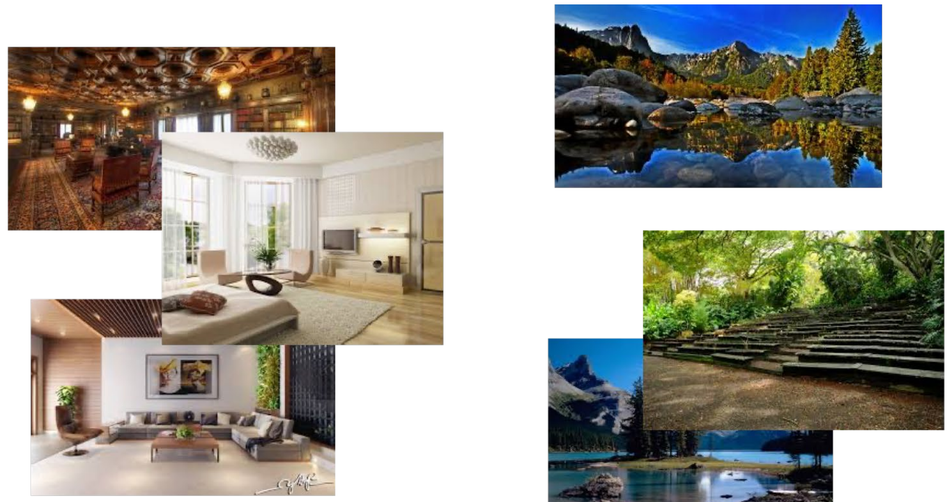

Training data

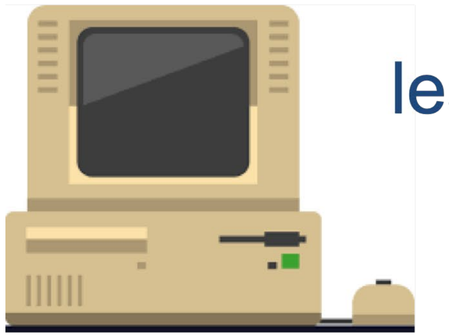

learning (i.e.,training)

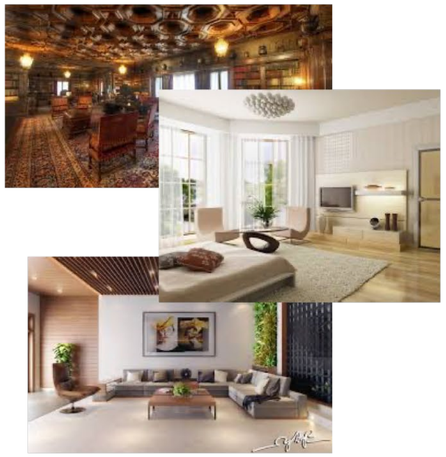

Training data

Label: outdoor

Label: indoor

Test data

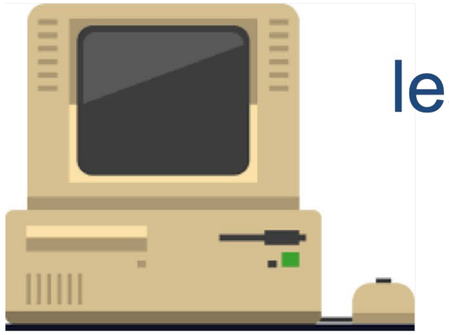

learning (i.e.,training)

testing

performance

How to represent data?

input data

$x \in \mathbb{R}^d$

d : feature dimension

$$x = \begin{bmatrix} x_1 \\ x_2 \end{bmatrix}$$

x_1 Tempo

x_2 Intensity

There can be many features!

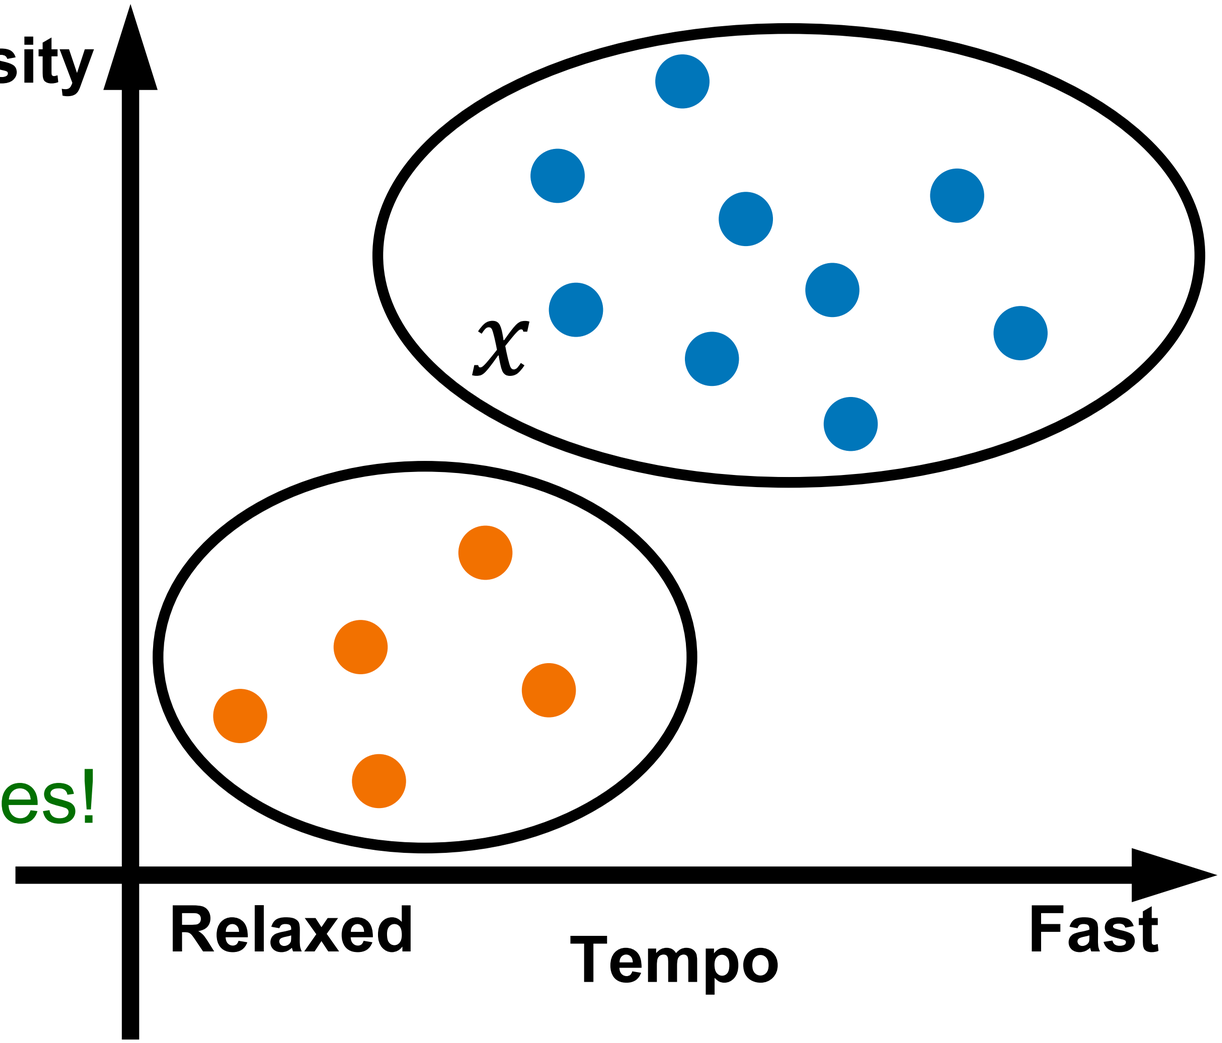

How to represent data?

Label

$y \in \{0,1\}$

Where “supervision” comes from

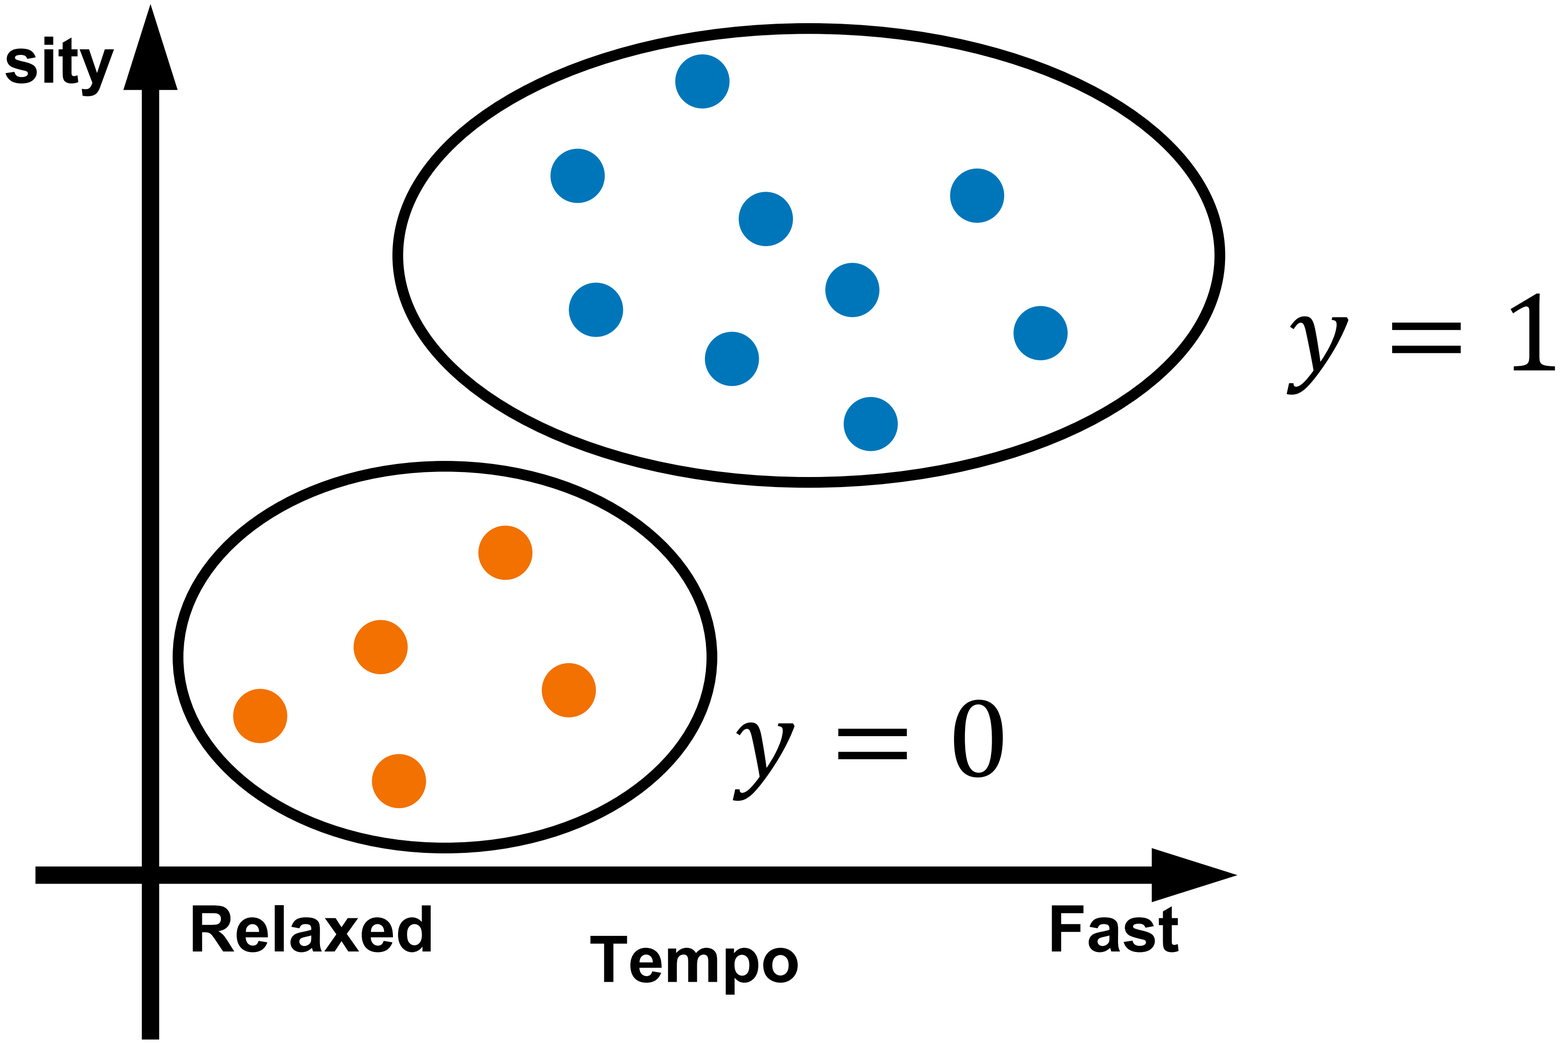

Represent various types of data

- Image
  - Pixel values

- Bank account
  - Credit rating, balance, # deposits in last day, week, month, year, #withdrawals

Two Types of Supervised Learning Algorithms

Classification

Regression

Example of regression: housing price prediction

Given: a dataset that contains n samples

$(x_1, y_1), (x_2, y_2), \ldots, (x_n, y_n)$

Task: if a residence has **x** squares feet, predict the price?

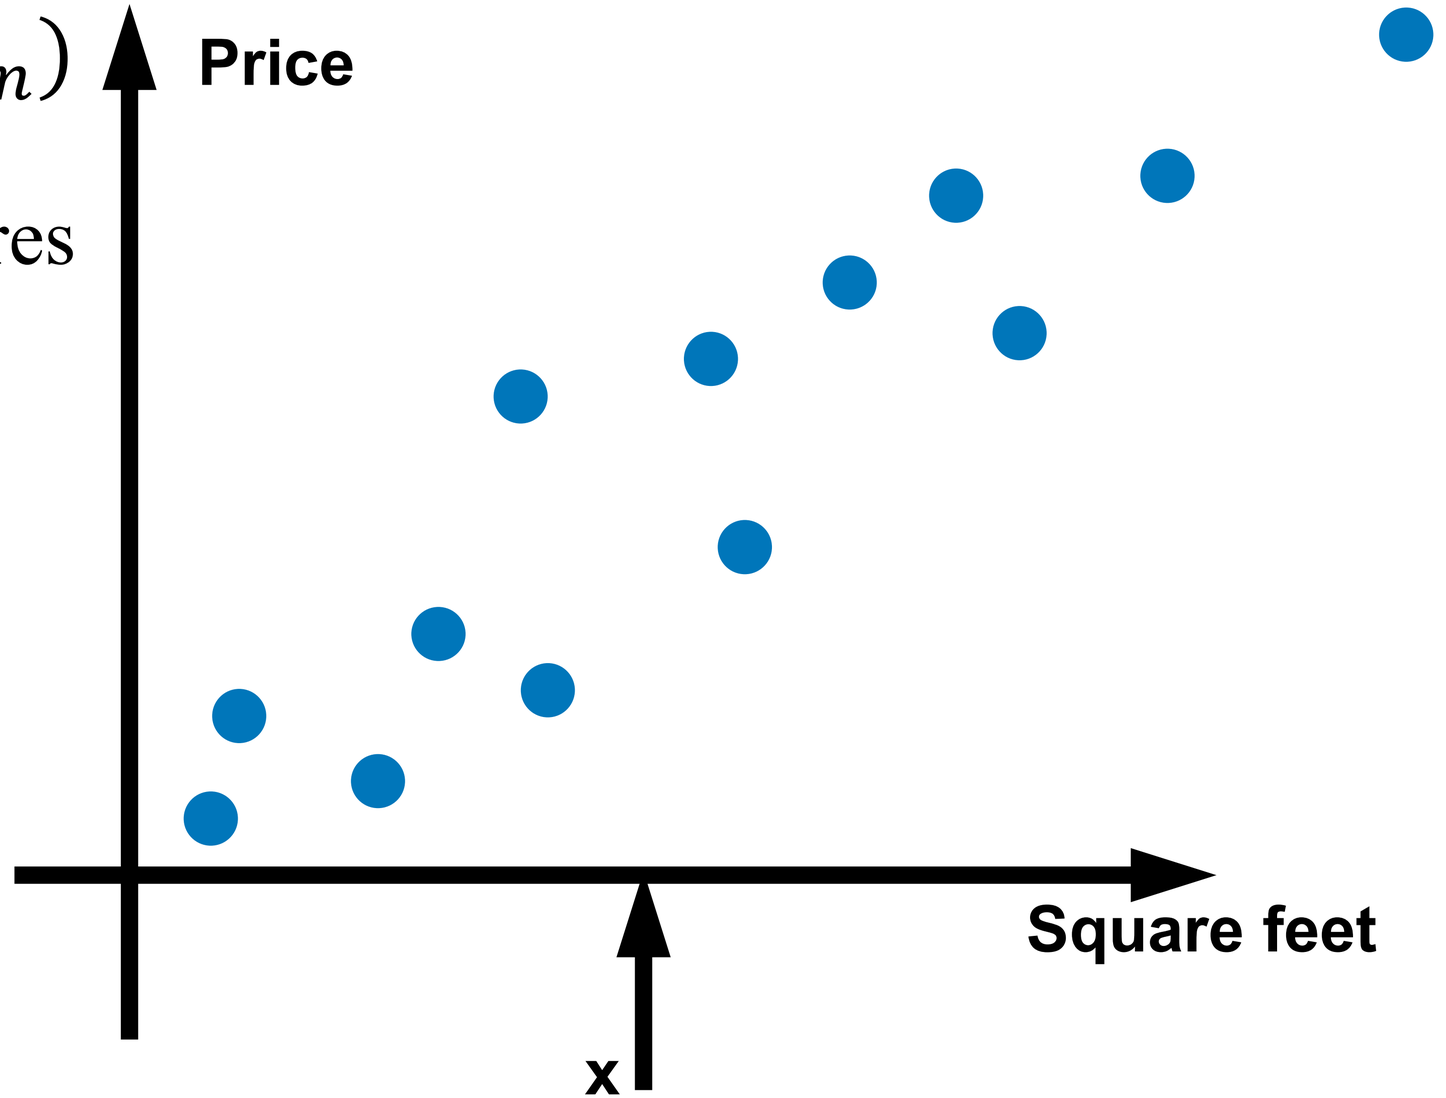

Example of regression: housing price prediction

Given: a dataset that contains n samples

$$(x_1, y_1), (x_2, y_2), \ldots, (x_n, y_n)$$

Task: if a residence has **x** squares feet, predict the price?

$$y \in \mathbb{R}$$

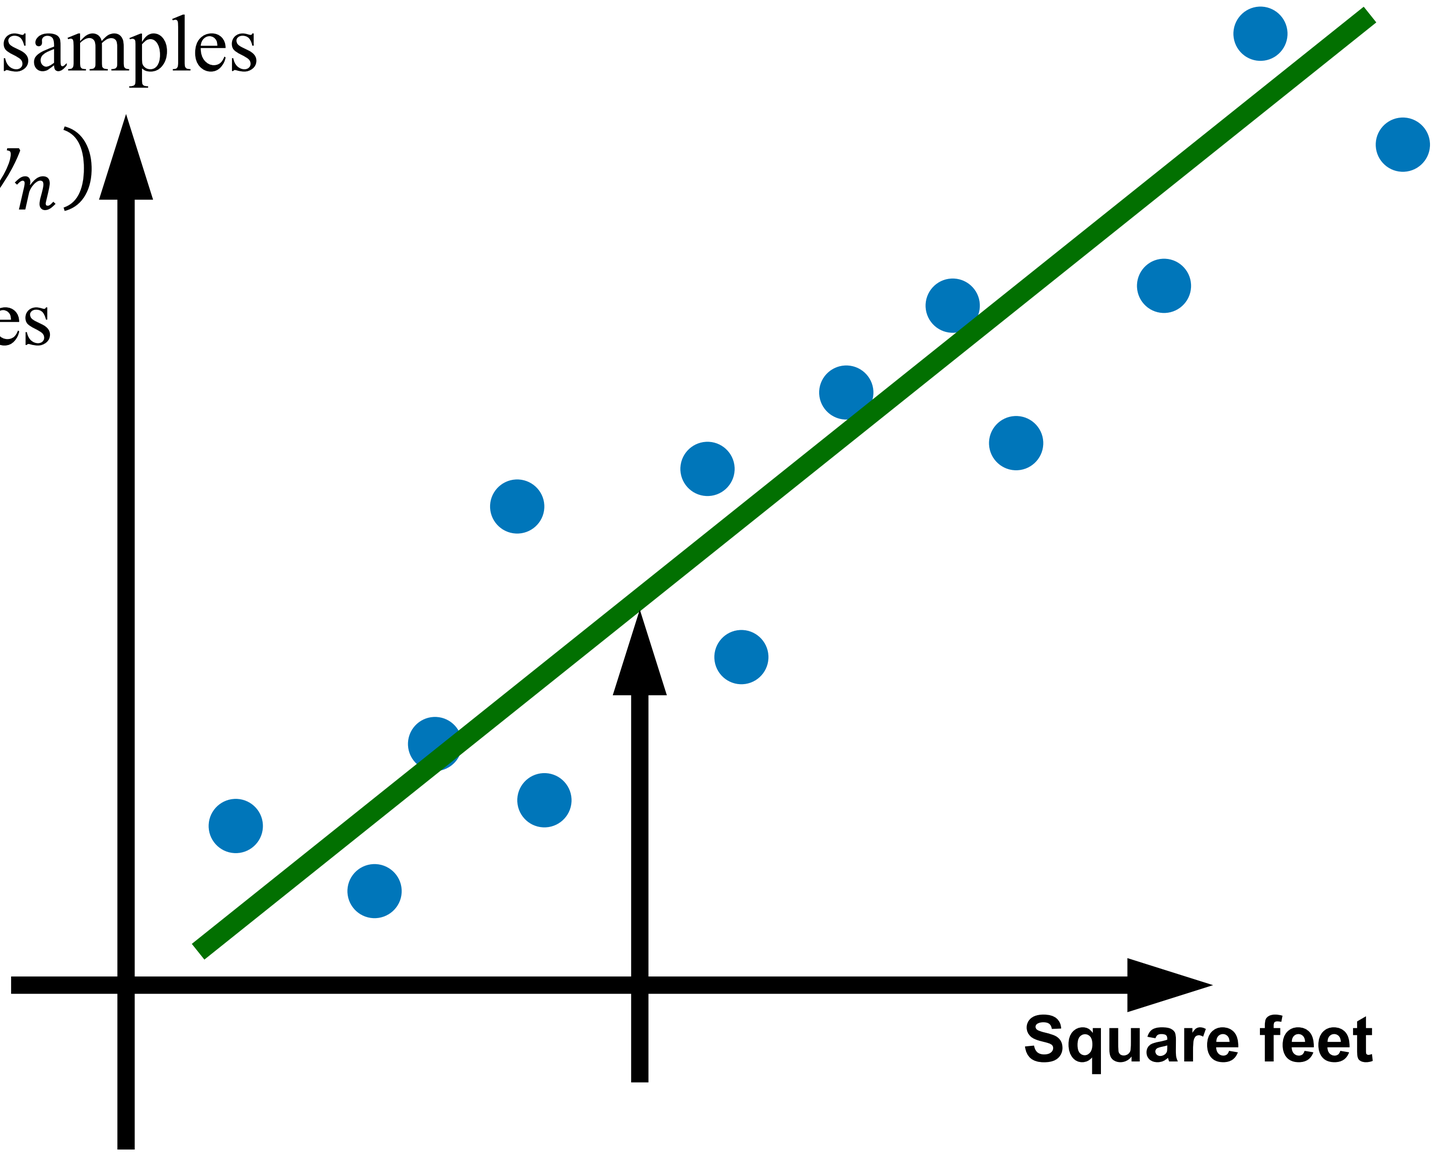

Example of regression: housing price prediction

Input with more features (e.g., lot size

(size, lot size) → price

features/input
$x \in \mathbb{R}^2$

label/output
$y \in \mathbb{R}$

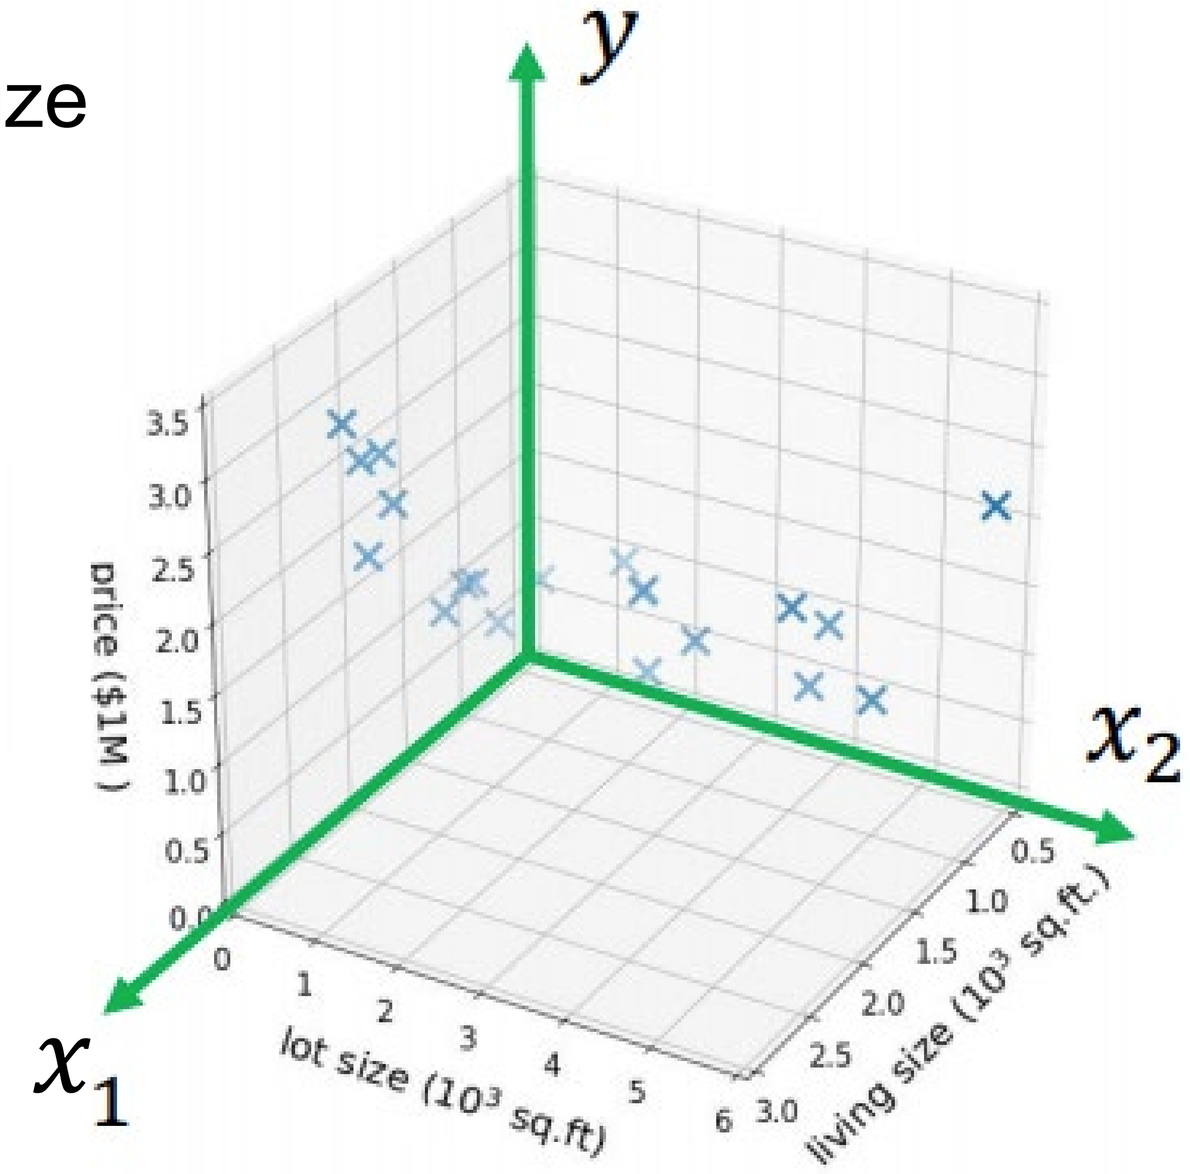

(credit: stanford CS229)

Supervised Learning: More examples

x = raw pixels of the image

y = bounding boxes

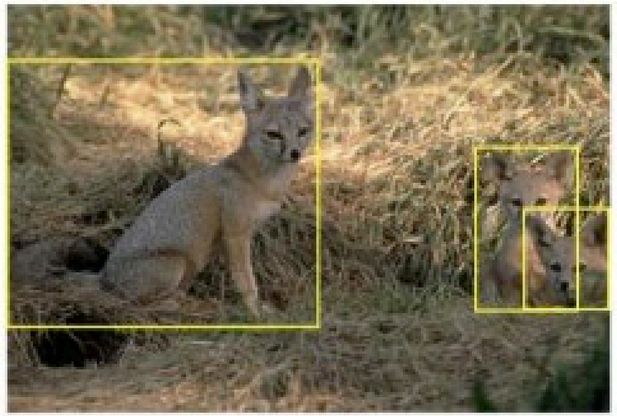

kit fox

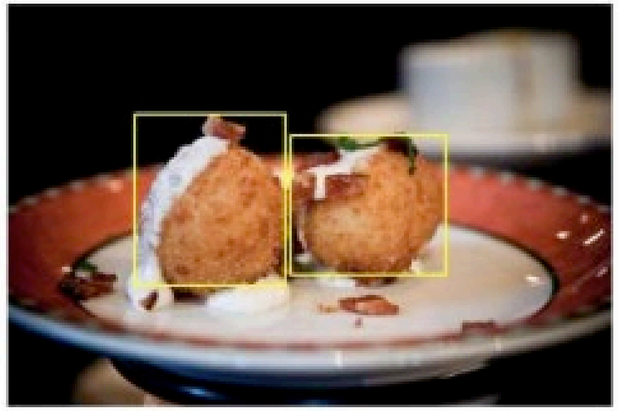

croquette

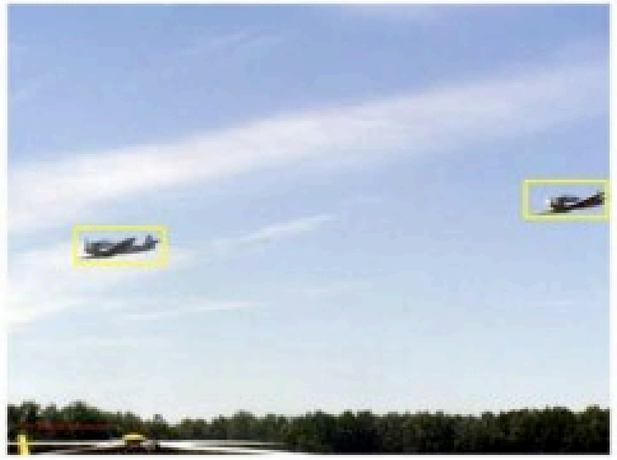

airplane

frog

Russakovsky et al. 2015

Two Types of Supervised Learning Algorithms

Classification

- the label is a **discrete** variable

$$y \in \{1,2,3,\ldots,K\}$$

Regression

- the label is a **continuous** variable

$$y \in \mathbb{R}$$

Training Data for Supervised Learning

Training data is a collection of input instances to the learning algorithm:

$$(x_1, y_1), (x_2, y_2), (x_3, y_3), \ldots, (x_n, y_n)$$

input label

The training data is the "**experience**" given to a learning algorithm

Goal of Supervised Learning

Given training data

$$(x_1, y_1), (x_2, y_2), (x_3, y_3), \ldots, (x_n, y_n)$$

Learn a function mapping $f : X \rightarrow Y$, such that $f(x)$ predicts the label y on **future** data x (not in training data)

Goal of Supervised Learning

Training set error

- 0-1 loss for classification $\ell = \frac{1}{n}\sum_{i=1}^{n}(f(\mathbf{x}_i) \neq y_i)$
- Squared loss for regression: $\ell = \frac{1}{n}\sum_{i=1}^{n}(f(\mathbf{x}_i) - y_i)^2$

A learning algorithm optimizes the training objective

$$f^* = \text{argmin}\ \mathbb{E}_{(x,y)}\ell(f(x), y)$$

Details in upcoming lectures :)

Quiz Break

Q1-1: Which is true about feature vectors?

A. Feature vectors can have at most 10 dimensions
B. Feature vectors have only numeric values
C. The raw image can also be used as the feature vector
D. Text data don’t have feature vectors

Quiz Break

Q1-1: Which is true about feature vectors?

A. Feature vectors can have at most 10 dimensions
B. Feature vectors have only numeric values
C. The raw image can also be used as the feature vector
D. Text data don’t have feature vectors

A. Feature vectors can be high dimensional
B. Some feature vectors can have other types of values like strings
D. Bag-of-words is a type of feature vector for text

Quiz Break

Q1-2: Which of the following is not a common task of supervised learning?

A. Object detection (predicting bounding box from raw images)
B. Classification
C. Regression
D. Dimensionality reduction

Quiz Break

Q1-2: Which of the following is not a common task of supervised learning?

A. Object detection (predicting bounding box from raw images)
B. Classification
C. Regression
D. Dimensionality reduction

Part II: Unsupervised Learning (no teacher)

Unsupervised Learning

- Given: dataset contains **no label** $x_1, x_2, \ldots, x_n$
- **Goal:** discover interesting patterns and structures in the data

Unsupervised Learning

- Given: dataset contains **no label** $x_1, x_2, \ldots, x_n$
- **Goal:** discover interesting patterns and structures in the data

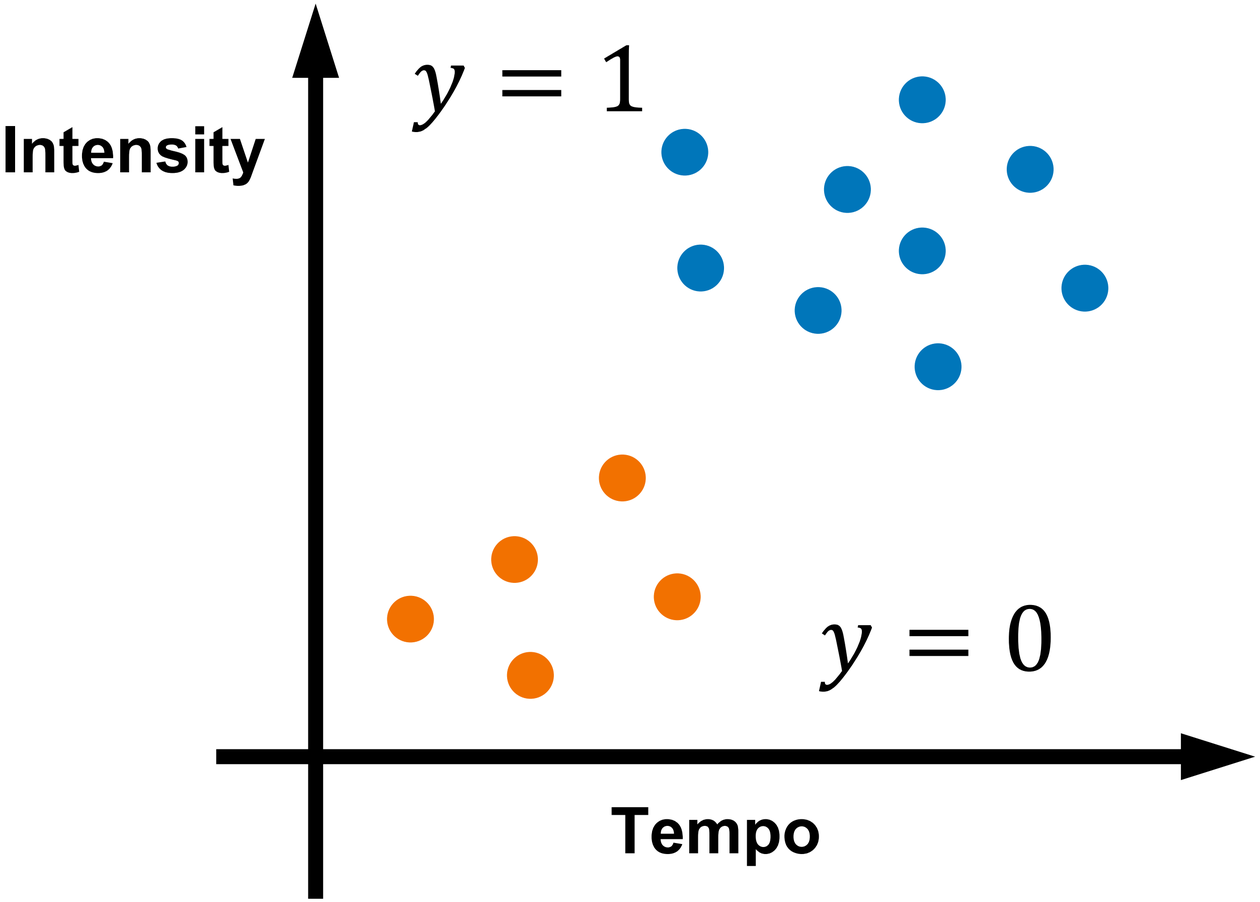

Unsupervised Learning

- Given: dataset contains **no label** $x_1, x_2, \ldots, x_n$
- **Goal:** discover interesting patterns and structures in the data

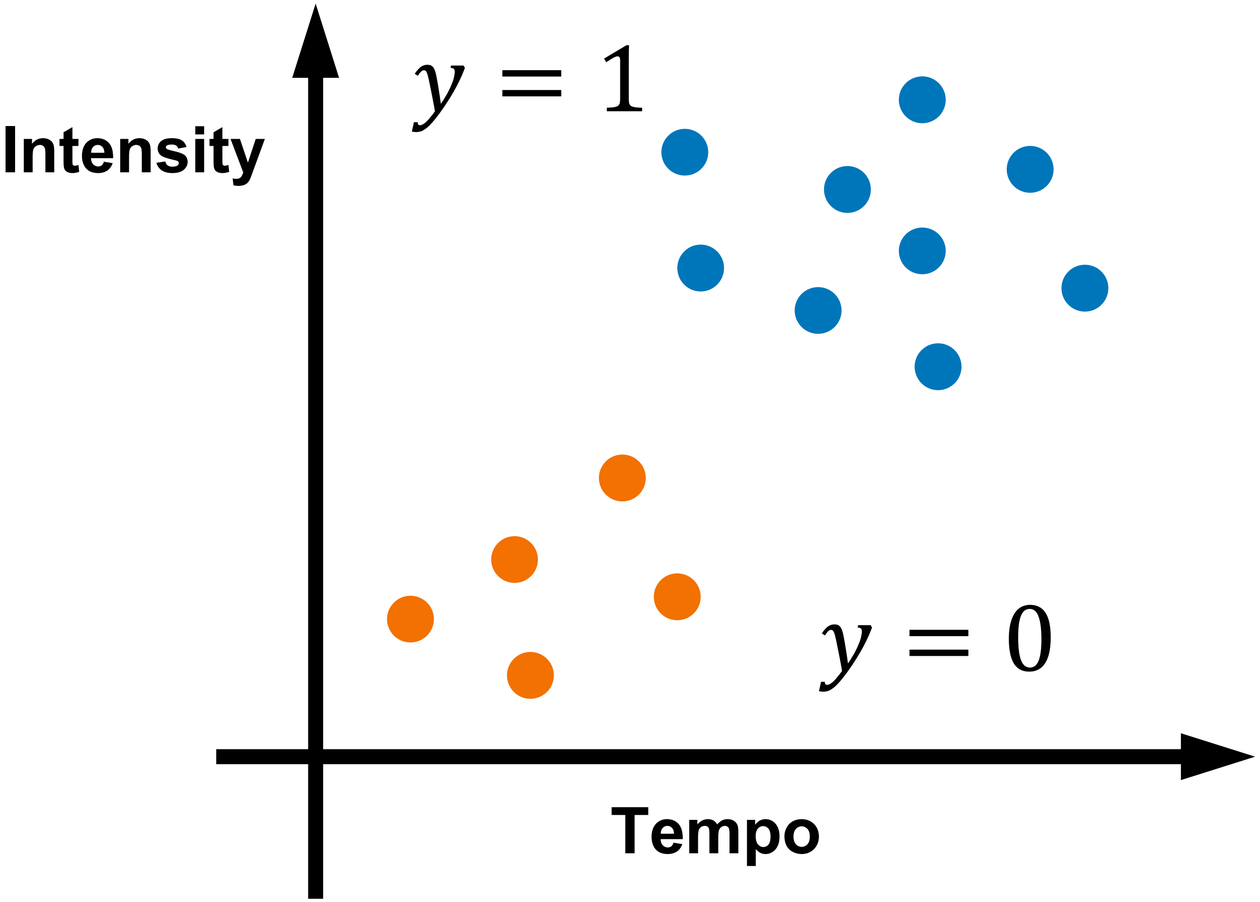

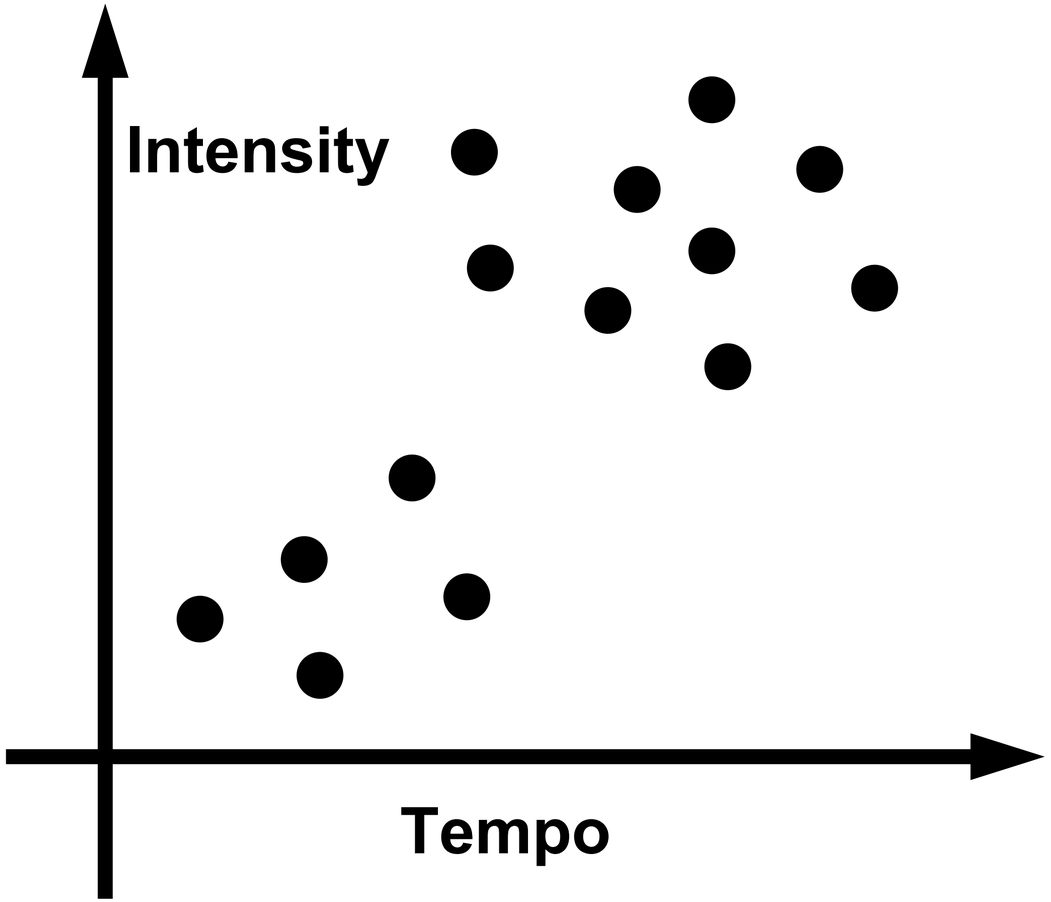

Clustering

- Given: dataset contains **no label** $x_1, x_2, \ldots, x_n$
- **Output:** divides the data into clusters such that there are intra-cluster similarity and inter-cluster dissimilarity

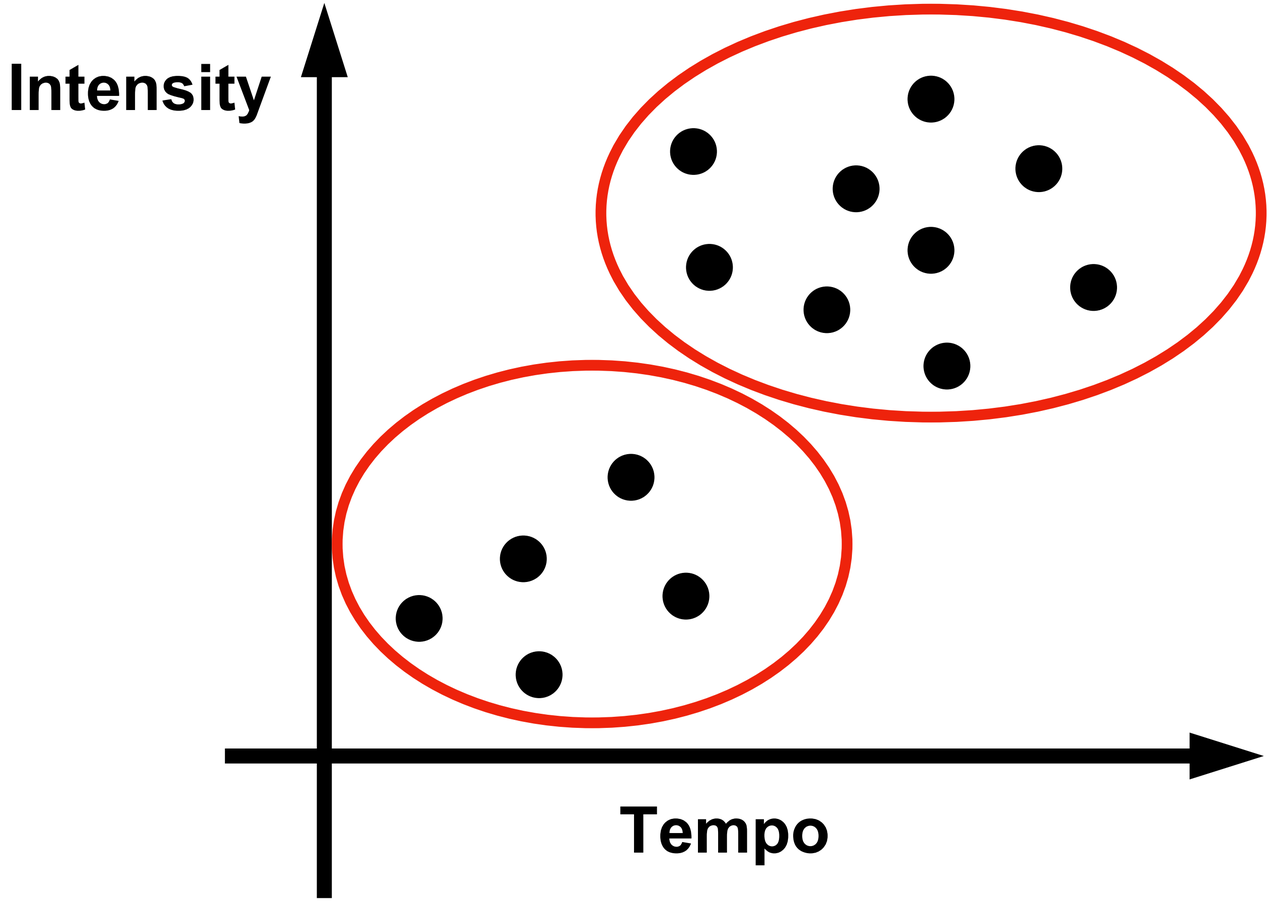

Clustering

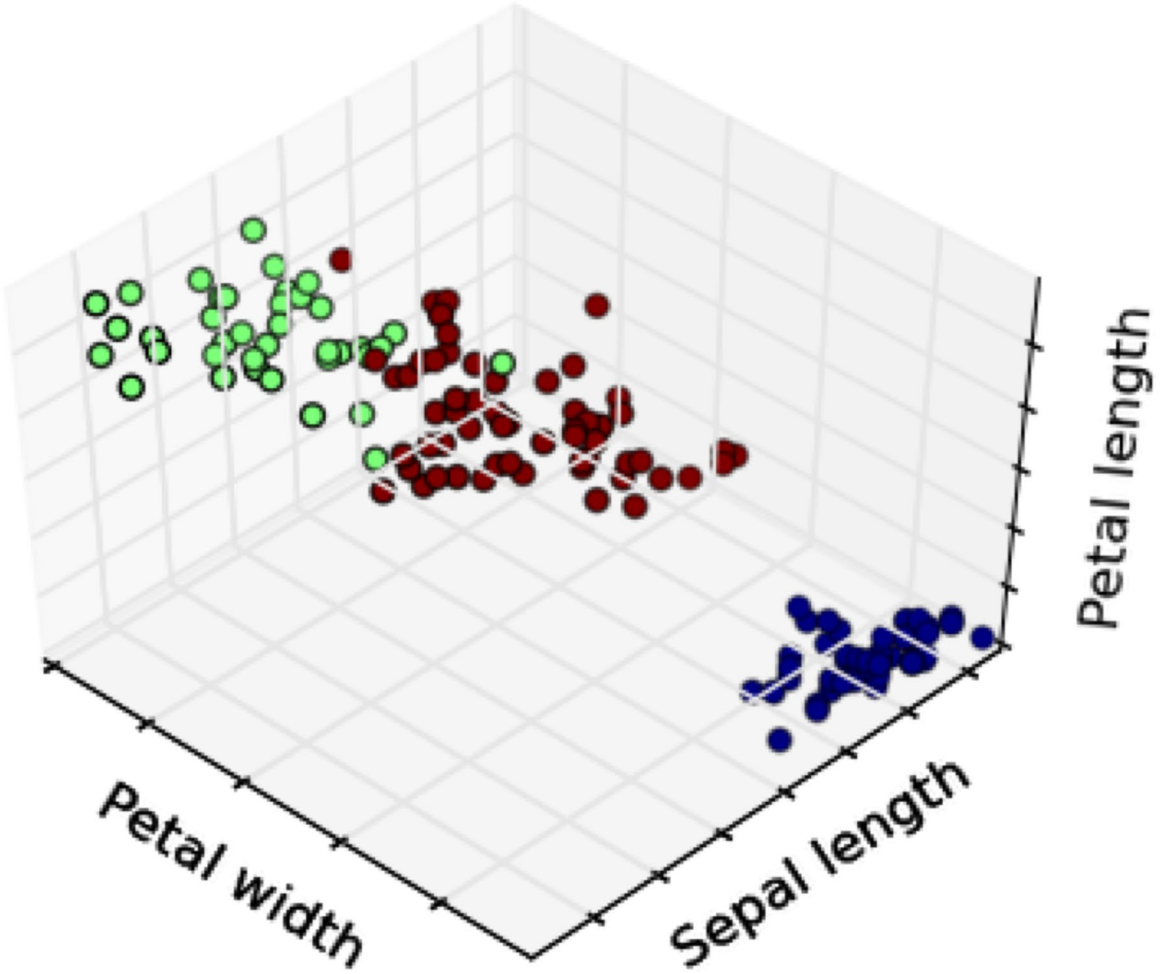

Clustering Irises using three different features

The colors represent clusters identified by the algorithm, **not** y's provided as input

Clustering

- You probably have >1000 digital photos stored on your phone
- After this class you will be able to organize them better (based on visual similarity)

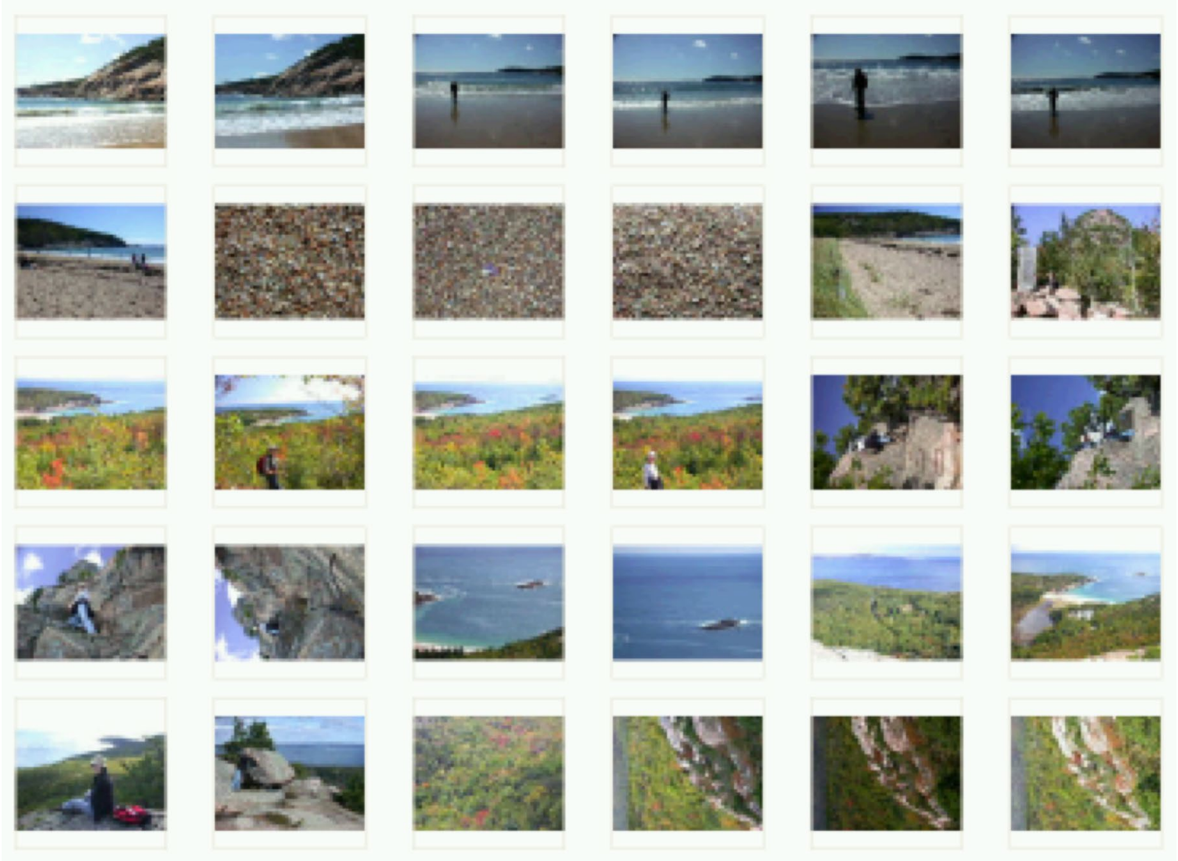

Clustering Genes

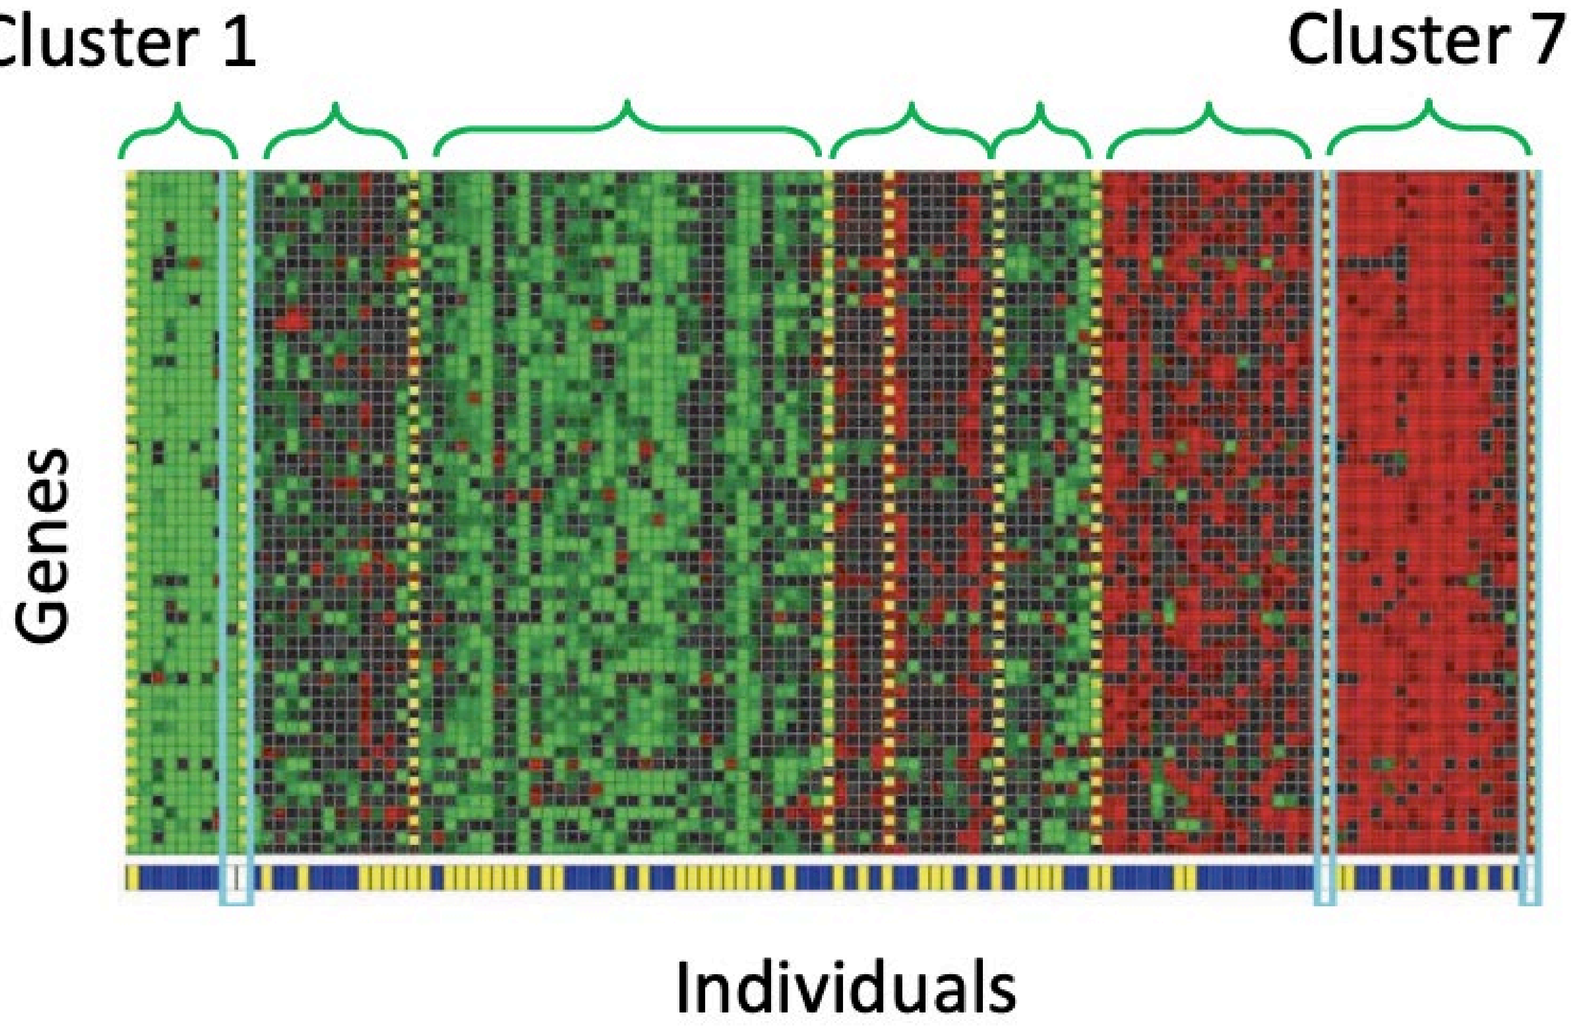

Identifying Regulatory Mechanisms using Individual Variation Reveals Key Role for Chromatin Modification. [Su-In Lee, Dana Pe'er, Aimee M. Dudley, George M. Church and Daphne Koller. '06]

Clustering Words with Similar Meanings

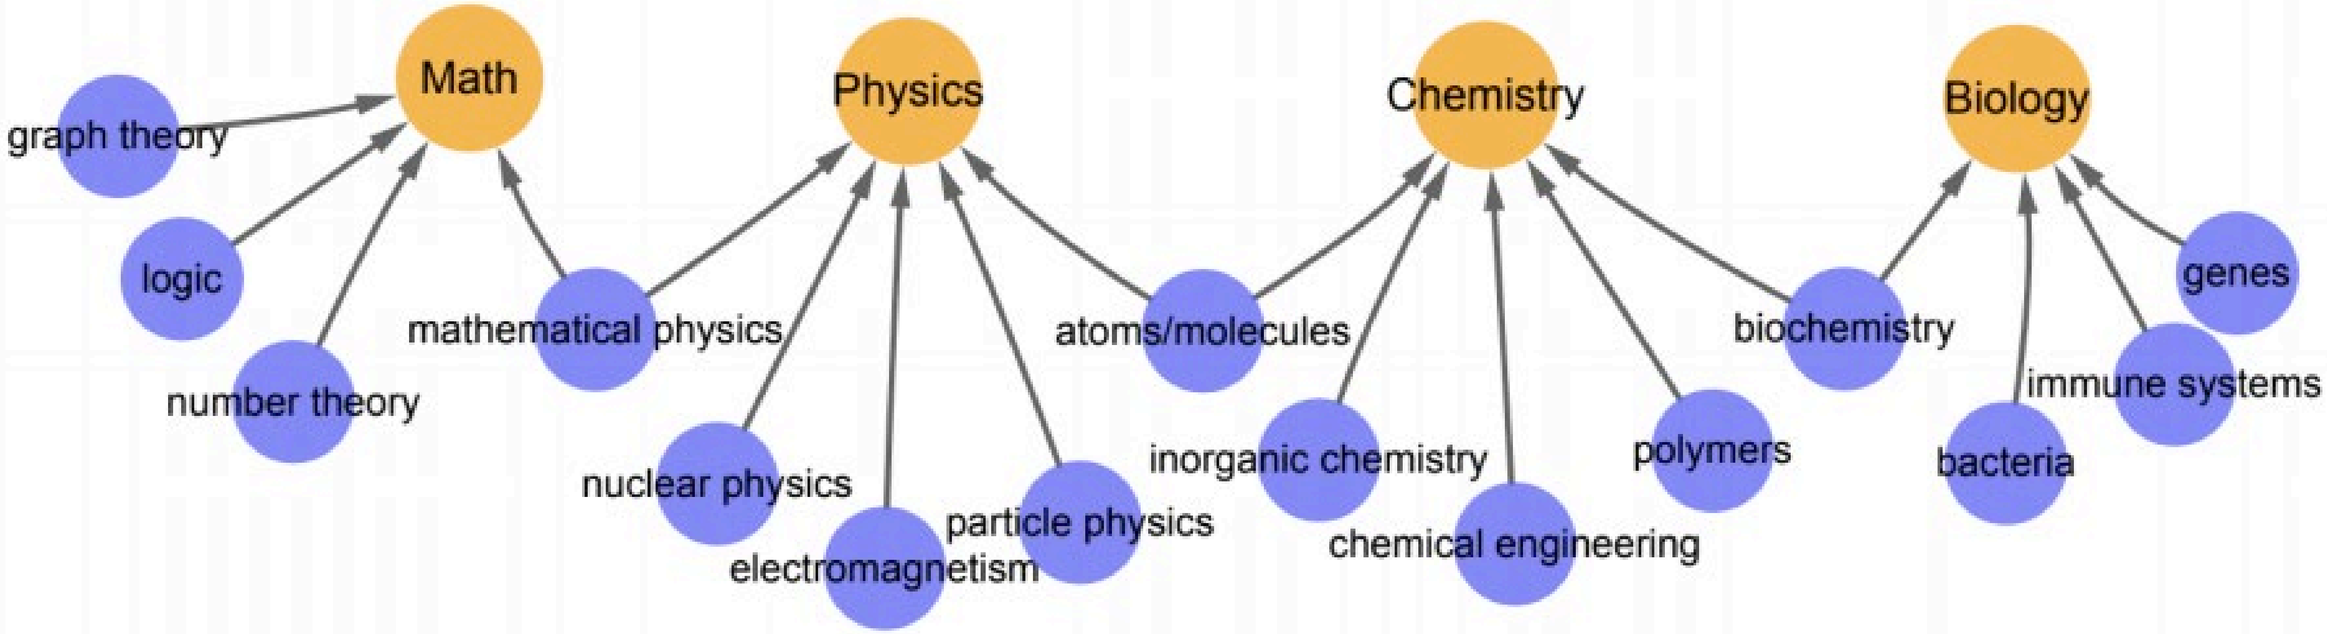

[Arora-Li-Liang-Ma-Risteski, TACL'17,18]

How do we perform clustering?

Many clustering algorithms.

We will look at the two most frequently used ones:

- *K-means clustering*: we specify the desired number of clusters, and use an iterative algorithm to find them
- *Hierarchical clustering*: we build a binary tree over the dataset

Quiz Break

Q2-1: Which is true about machine learning?

A. The process doesn’t involve human inputs
B. The machine is given the training and test data for learning
C. In clustering, the training data also have labels for learning
D. Supervised learning involves labeled data

Quiz Break

Q2-1: Which is true about machine learning?

A. The process doesn’t involve human inputs
B. The machine is given the training and test data for learning
C. In clustering, the training data also have labels for learning
D. Supervised learning involves labeled data

A. The labels are human inputs
B. The machine should not have test data for learning
C. No labels available for clustering

Quiz Break

Q2-2: Which is true about unsupervised learning?

A. There are only 2 unsupervised learning algorithms
B. Kmeans clustering is a type of hierarchical clustering
C. Kmeans algorithm automatically determines the number of clusters k
D. Unsupervised learning is widely used in many applications

Quiz Break

Q2-2: Which is true about unsupervised learning?

A. There are only 2 unsupervised learning algorithms
B. Kmeans clustering is a type of hierarchical clustering
C. Kmeans algorithm automatically determines the number of clusters k
D. Unsupervised learning is widely used in many applications

Part III: Reinforcement Learning (Learning from rewards)

Reinforcement Learning

- Given: an agent that can take actions and a reward function specifying how good an action is.
- **Goal:** learn to choose actions that maximize future reward total.

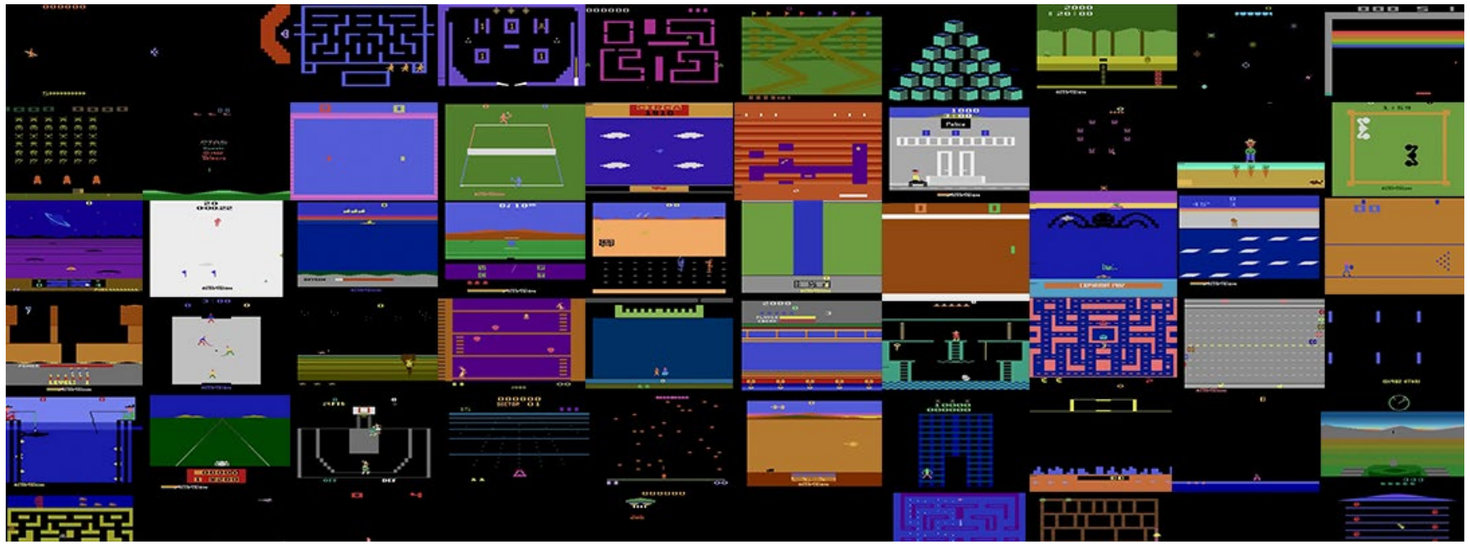

Google Deepmind

Reinforcement Learning Key Problems

1. Problem: actions may have delayed effects.
   - Requires **credit-assignment**
2. Problem: maximal reward action is unknown
   - Exploration-exploitation trade-off

"..the problem [exploration-exploitation] was proposed [by British scientist] to be dropped over Germany so that German scientists could also waste their time on it."

- Peter Whittle

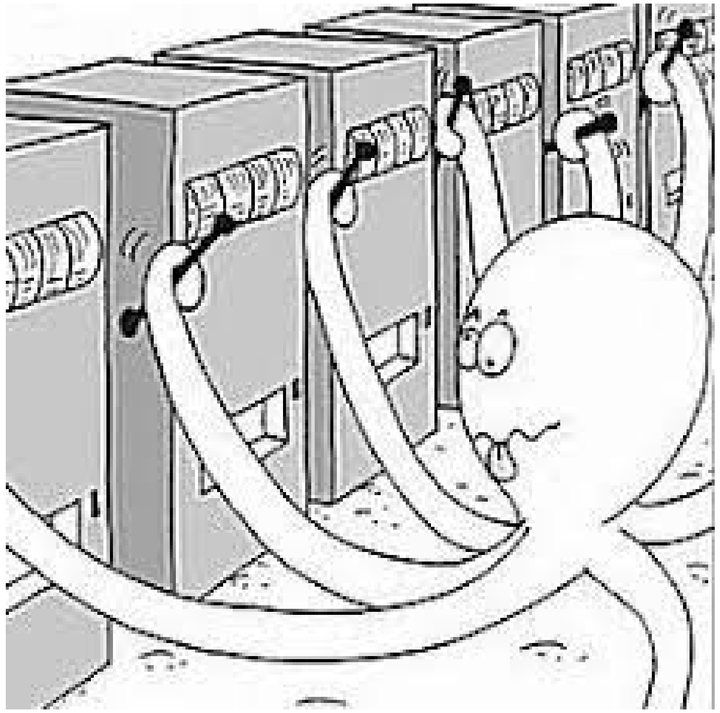

Multi-armed Bandit

Today’s recap

- What is machine learning?
- Supervised Learning
  - Classification
  - Regression
- Unsupervised Learning
  - Clustering
- Reinforcement Learning

Thanks!