


includeNova/BWAPI/Client/Event.h

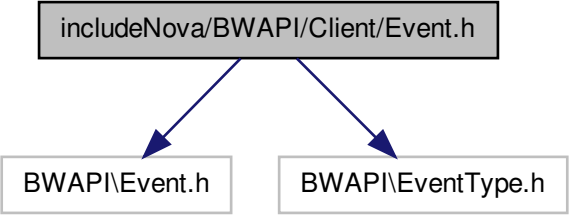

```
graph TD; A[includeNova/BWAPI/Client/Event.h] --> B[BWAPI\Event.h]; A --> C[BWAPI\EventType.h];
```

The diagram illustrates a header file inclusion structure. At the top, a gray box contains the text 'includeNova/BWAPI/Client/Event.h'. Two blue arrows point downwards from this box to two separate white boxes below. The left box contains 'BWAPI\Event.h' and the right box contains 'BWAPI\EventType.h'.

BWAPI\Event.h

BWAPI\EventType.h