


Skynet/include/BWAPI/Client/Event.h

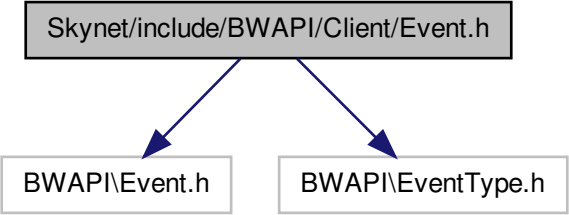

```
graph TD; A[Skynet/include/BWAPI/Client/Event.h] --> B[BWAPI\Event.h]; A --> C[BWAPI\EventType.h];
```

The diagram illustrates a header file inclusion structure. At the top, a gray box contains the text 'Skynet/include/BWAPI/Client/Event.h'. Two blue arrows point downwards from this box to two separate white boxes below. The left box contains 'BWAPI\Event.h' and the right box contains 'BWAPI\EventType.h'. This indicates that the top-level header file includes both of these sub-API headers.

BWAPI\Event.h

BWAPI\EventType.h