


UAlbertaBot_src/BWAPI_3_6/include/BWAPI/Race.h

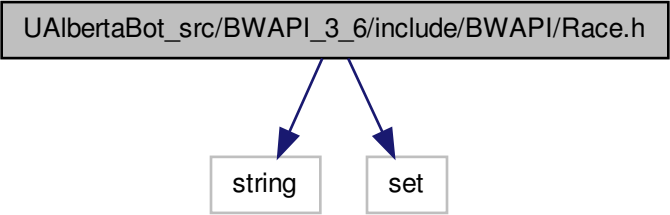

```
graph TD; A["UAlbertaBot_src/BWAPI_3_6/include/BWAPI/Race.h"] --> B["string"]; A --> C["set"];
```

The diagram illustrates the dependencies of the header file `UAlbertaBot_src/BWAPI_3_6/include/BWAPI/Race.h`. It features a central grey box at the top containing the file path. Two blue arrows originate from the bottom center of this box, pointing downwards to two separate white boxes. The left box contains the text `string` and the right box contains the text `set`, indicating that the `Race.h` file depends on these two standard C++ types.

string

set