


trunk/bwapi/BWAPI/Source/NewHackUtil.h

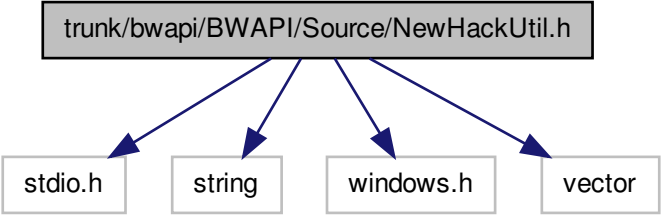

```
graph TD; A[trunk/bwapi/BWAPI/Source/NewHackUtil.h] --> B[stdio.h]; A --> C[string]; A --> D[windows.h]; A --> E[vector];
```

The diagram illustrates the dependencies of the file `trunk/bwapi/BWAPI/Source/NewHackUtil.h`. It is represented as a central gray box at the top. Four blue arrows point downwards from this box to four separate white boxes below it. These boxes contain the names of the files it depends on: `stdio.h`, `string`, `windows.h`, and `vector`.

stdio.h

string

windows.h

vector