


trunk/bwapi/include/BWAPI/Region.h

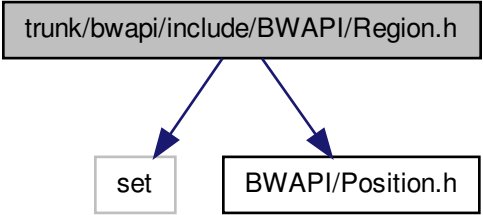

```
graph TD; A[trunk/bwapi/include/BWAPI/Region.h] --> B[set]; A --> C[BWAPI/Position.h];
```

The diagram illustrates the dependencies of the file `trunk/bwapi/include/BWAPI/Region.h`. It is represented as a box at the top with two arrows pointing downwards to two other boxes: `set` on the left and `BWAPI/Position.h` on the right.

set

BWAPI/Position.h